





F60/200 - IMC Vulture 726 Free-standing Food Waste Disposer - 1 Phase - W 400 mm - 1.1 kW Reliable, efficient, safe and easy to operate, the compact 726 Waste
Disposer allows operators to quickly and effectively remove waste, to create a safer and cleaner kitchen.

- Fast and efficient disposal of up to 400kg of food waste per hour.
- Handles up to 850 covers per sitting ideal for medium-size kitchens.
- For medium waste (plate waste, vegetables and peelings, meat and fish scraps).
- Compact, free-standing design, for quick and easy loading.
- Manually reversible motor to extend operational life.
- Suitable for medium kitchens with single-phase power supply.

| Summary                   |                                   | Power and Performance                 |                                          |
|---------------------------|-----------------------------------|---------------------------------------|------------------------------------------|
| Brand                     | IMC                               | Total Power kW                        | 1.1                                      |
| Range                     | Vulture                           | HP                                    | 1.5                                      |
| Series                    | 700 Series                        | IP Rating                             | IP55                                     |
| Power Type                | Electric                          |                                       |                                          |
| Unit Type                 | Free-standing                     |                                       |                                          |
| Available in UK Only      | No                                |                                       |                                          |
| UK Warranty               | 2 Years Parts and Labour Warranty |                                       |                                          |
| Export Warranty           | Contact your local dealer         |                                       |                                          |
| Mounting                  | Free-standing                     |                                       |                                          |
| GTIN                      | 5056105199243                     |                                       |                                          |
| Key Specifications        |                                   | Capacity                              |                                          |
| Operator Safety           | Interlocks                        | Type of Waste                         | Medium waste                             |
| WRAS Approved             | WRAS Compliant [if cistern fed]   | Covers Per Sitting                    | 850                                      |
| Airbreak                  | No                                | Capacity Kg per Hour                  | 400                                      |
| Weights and Dimensions    |                                   | Supply Connections                    |                                          |
| Unit Height (External) mm | 850                               | Requires Installation                 | Yes                                      |
| Unit Width (External) mm  | 400                               | Requires Electrical Supply            | Yes                                      |
| Unit Depth (External) mm  | 600                               | UK 3 Pin Plug                         | No                                       |
| Net Weight Kg             | 46.5                              | Requires Hardwiring                   | Yes                                      |
|                           |                                   | <b>Electrical Supply Rating Watts</b> | 1100                                     |
|                           |                                   | Single Phase Amps                     | 7.4                                      |
|                           |                                   | Single Phase Voltage                  | 230                                      |
|                           |                                   | Water Supplied From                   | Storage cistern                          |
|                           |                                   | Water Connection Pressure Bar         | 0.4                                      |
|                           |                                   | Drain Connection                      | 40mm Pipe with P or S trap; MIN fall = 1 |
|                           |                                   | Water Connection                      | 15mm                                     |
| Shipping                  |                                   |                                       |                                          |
| Packed Weight Kg          | 54.5                              |                                       |                                          |
| Packed Height cm          | 104                               |                                       |                                          |
| Packed Width cm           | 48                                |                                       |                                          |
| Packed Depth cm           | 63                                |                                       |                                          |





## **Available Options**

SIDE PANEL

**E60/010** 726 SIDE PANEL


MAG CUTLERY SAVER


**VS167** 700/800/904/904X MAGNETIC CUTLERY SAVER


WATER FLOW CONTROL

**VS352** 726 WATER FLOW CONTROL

## **Technical Picture**





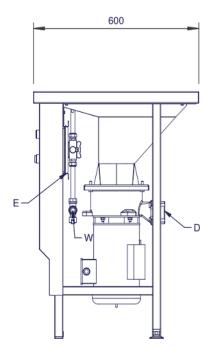







**Lincat Limited** 

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of

**Customer Care** 

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

**Export Customers** 

**Tel:** +44 1522 503250

Email: export@lincat.co.uk

**Opening Hours** 

Monday - Friday:

8.30am - 5pm