

GO 'CHILLY' CF031AG

friulinox
refrigeration excellence

Catering Blast Chiller/Freezer - 3x Trays

ITEM No. _____

Model options:

- CF031AG GO "CHILLY" Blast Chiller/Freezer
FR6V1042B4200
Chilling capacity - 8Kg
Freezing capacity - 5Kg

Standard equipment:

3x pairs shelf supports - 1/1 GN

Optional extras:

- Heated core probe
- PC connection & printer kit



Model CF031AG

"G" Control Functions

- Pre-cooling function
- Soft and Hard timed or core probe blast chilling
- Soft and Hard timed or core probe freezing
- Infinite timed cycle with settable room set-point
- Customised blast chilling and freezing cycles (up to 99 cycles)
- Automatic storing at end of blast chilling/freezing cycle
- Automatic recognition of the core probe, if inserted into the product to blast chill/freeze
- Timed manual defrosting
- LCD control panel

Main Features

- External sides and top in AISI 304 18/10 stainless steel th. 0.6mm (Scotch-Brite satin finish)
- Door in stainless steel th. 0.8mm (Scotch-Brite satin finish)
- Inner in stainless steel with rounded corners
- Cavity with central drain for discharge of washing water
- High-density polyurethane's insulation (approx. 42 kg/m³), without CFC or HCFC
- Copper-aluminium evaporator with cataphoresis anti-corrosion treatment
- High performance copper-aluminium condenser
- Heating element in the door frame
- Ergonomic handle across entire height of door and magnetic seals on all 4 sides of the door

Internal Setup

- Slides in 18/10 stainless steel encased on the sides of the room, easily removable for washing
- Core probe

Cooling System

- Indirect blowing electronic fans, efficient but gentle on food
- Hermetic Compressor
- R452A ecological refrigerant fluid
- Evaporators with large exchange surfaces, for high cooling efficiency
- Manual defrosting device and condensate evaporation system without use of electrical energy

Controls & Safety Devices

- Control and command circuit board
- Equipped with high-visibility custom display, which highlights the status of the appliance at all times
- The microprocessor can memorise up to 99 programs
- Compressor protected by thermal overload cut-out with automatic reset



Hubbard
systems

Hubbard Systems (a division of HTG Trading Ltd)

106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom

01473 350000

sales@hubbardsystems.co.uk

Due to continual research and development, these specifications are subject to change without notification - March 2021

GO 'CHILLY' CF031AG - Catering Blast Chiller/Freezer - 3x 1/1GN Trays


GO 'CHILLY' CF031AG

friulinox
refrigeration excellence

Catering Blast Chiller/Freezer - 3x Trays

Section view: dimensions in mm [dimensions in inches]

ITEM No. _____

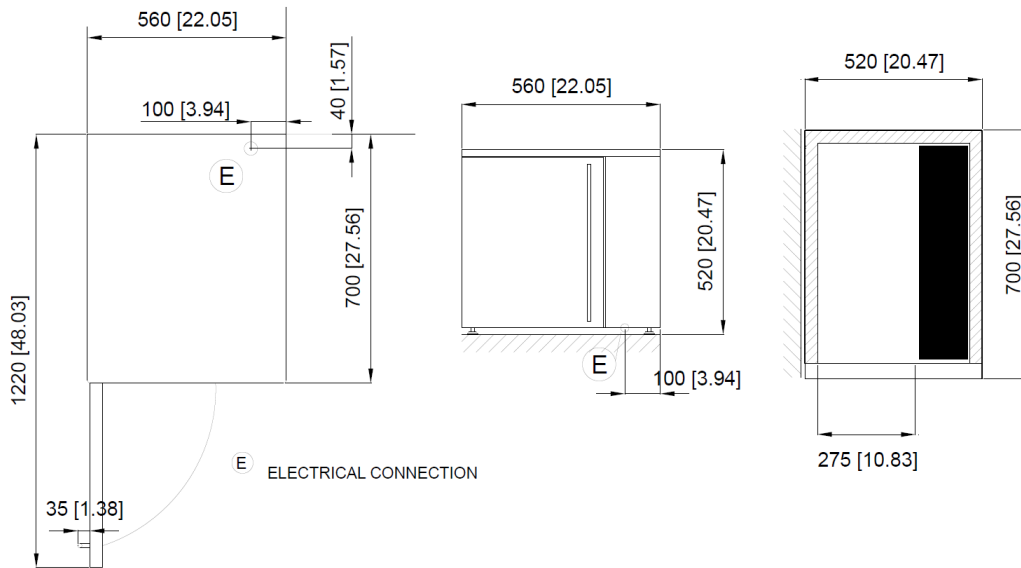

GO 'CHILLY'	CF031AG
NET dimensions WxDxH (90° opening door depth)	560 x 700 x 520 mm (1080 mm)
GROSS dimensions WxDxH	650 x 750 x 700 mm
Weight (NET / GROSS)	52 / 65 Kg
GROSS volume	0.34 m ³
Internal dimensions WxDxH	330 x 600 x 275 mm
Insulation thickness	35 mm
Doors	1 (left hinge)
Internal setup	Slide with tray guides
Pitch	35 mm 5x(40)
Load capacity (No. trays 1/1GN)	3 trays GN1/1
Blast CHILLING process +65 / +10 °C	115 mins
Blast CHILLING capacity	8 Kg
Blast FREEZING process +65 / -18 °C	270 mins
Blast FREEZING capacity	5 kg
Refrigerant / gas charge	R452a / 550g
Climate class	ST
Defrost process	OPEN DOOR
Noise level	<70 dB(A)
Power supply voltage	230v / 50hz / 1ph
Electrical input (nominal)	3.4 A
Absorbed electrical power	587 W
Cooling power	487 W
Energy consumption - CHILLING	0.08 kWh/Kg
Energy consumption - FREEZING	0.27 kWh/Kg

* A dedicated power supply is required for safe operation. Friulinox equipment should never be operated on any form of extension lead, please consult a qualified electrician for correct installation advice.

*Data for air cooled units. Chilling data according to EN17032 standard



Hubbard systems

Hubbard Systems (a division of HTG Trading Ltd)

106 Claydon Business Park, Gt. Blakenham, Ipswich, Suffolk, IP6 ONL, United Kingdom

01473 350000

sales@hubbardsystems.co.uk

Due to continual research and development, these specifications are subject to change without notification - March 2021

GO 'CHILLY' CF031AG - Catering Blast Chiller/Freezer - 3x 1/1GN Trays