

ELEVATION SERIES GRANDE CUBE MAKER CIMO835/0836



Model: CIM0835 CIM0836



CIM0835G ON B55

Features and Benefits

- 30.25" (768 mm) wide space-saving design.
- Produces up to 800 lbs (363 kg) of ice per day.
- Energy and Environment
 - Exceeds new 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- Sanitation
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies, allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion[®] ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- Unique Dual Exhaust Air-cooled machines are designed to discharge hot air from both the side and top of the unit, increasing installation flexibility and reducing the potential of obstructed exhaust.
- Universal Smart Harness[™] control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

Bin Chart Kits for Combining Wider Bins with Smaller Models

Ice Form



GRANDE CUBE

 GRANDE CUBE DIMENSIONS

 W x D x H (in.)
 1¼ x 1½ x 7/8

 W x D x H (mm)
 31 x 29 x 22

					ICE ST	ORAGE B	INS				
Kits	Model No. Capacity Width	B25 242 lbs (110 kg) 30 in (762 mm)	B40 344 lbs (156 kg) 30 in (762 mm)	B42 351 lbs (160 kg) 22 in (559 mm)	B55 510 lbs (232 kg) 30 in (762 mm)	B700 680 lbs (308 kg) 30 in (762 mm)	B110 854 lbs (388 kg) 48 in (1,219 mm)	B1000 1,000 lbs (454 kg) 48 in (1,219 mm)	B1300 1,320 lbs (599 kg) 48 in (1,219 mm)	B1325 1,325 lbs (601 kg) 60 in (1,524 mm)	B1660 1,660 lbs (753 kg) 60 in (1524 mm)
	CIMO835	Kit Not Required		N/A	Kit Not I	Required	BPF-1	Hold Down Securement			
	CIMO836			IN/A	Kit Not Required		DFFT	Recommended			

*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS						
Ice Machine Model	Manifold					
ree maenine mouer	System	Replacement				
CIMO835	IFQ1	IOMQ (1)				
CIM0836	IFQI					

Note: All modular cube CIM units can be installed with the O_z-Matic™ Ozone Delivery System.

Ice Maker Warranty

COMMERCIAI	L WARRANTY			
lce Maker	3 YEARS parts and labor			
Evaporator and Compressor	5 YEARS parts			
Evaporator (when enrolled in our filter program)	7 YEARS parts and labor			




ELEVATION SERIES GRANDE CUBE MAKER CIMO835/0836




Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.

- A. Ice maker potable water in, ³/8" FPT.
- B. Ice maker water out, 3⁄4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

Dual Exhaust for Installation Flexibility



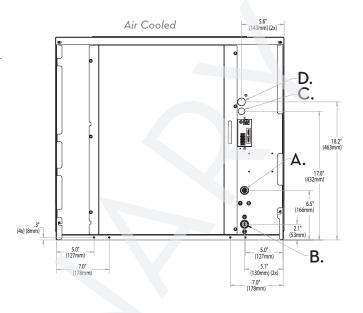

Operating Requirements

	MINIMUM	ΜΑΧΙΜΟΜ			
		60 Hz	50Hz		
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)		
Water Temp.	40°F (4.4°C)	100 F (38 C)			
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG (5.5 BAR)			

Dimensions

ALL MODELS							
W x D x H (in.)	30.25 x 24.25 x 26.9						
W x D x H (mm)	768 x 616 x 683						

Specifications

			Cube duction 24hrs	Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used				
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
CIMO835GA	Air	800 (363)	640 (290)	20	N/A	5.50	220-240/50/1	13.5	20	19,300
CIMO836GA	Air	040 (290)	20	IN/A	5.35	208-230/60/1	12.3	20	18,200	

* Daily ice production based on grande cube configuration

Notes:0 Number of Wires: Approx. Shipping Weight Ibs (kg): Refrigerant Type:

3 (including ground) CIM0835A 230 (104) • CIM0836A 230 (104) R404A