



## **DOMINATOR**PLUS

# E3101D Four Hotplate Oven Range

### Key features

- Two full depth rectangular hotplates and two fast-heating circular hotplates
  - Allows multiple cooking positions
- Independently controlled hotplates
  - Provides flexibility to chef
- Full width, removable drip tray
  - Easy to remove and keep clean
- Vitreous enamelled oven chamber
  - Easy to clean and to keep clean
- Wide oven temperature range of 100 - 250°C
  - Ideal to prepare a wide variety of food
- Drop down oven door with 90° position hinge
  - Quick access to load and unload oven
- Oven has 5 shelf positions and allows 2 shelf cooking
  - Versatile, ideal for a wide range of menu items
- Laser-etched control icons
  - Permanent, indelible markings

### Accessories




- Fully integrated extended flue
- Splashplate and plateshelf (not for use with extended flue)
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit



### Similar Models

- E3101D 4HP oven range with drop down door
- E3101D 3HP oven range with drop down door
- E3101 OTC 4HP fan-assisted oven range
- E9184 4HP oven range

*Four Hotplate Oven Range*

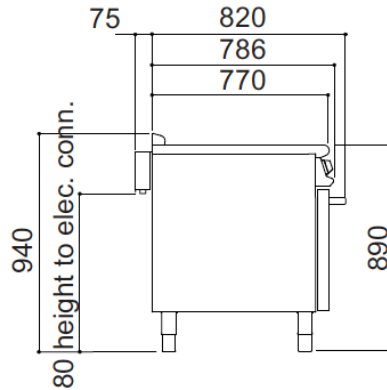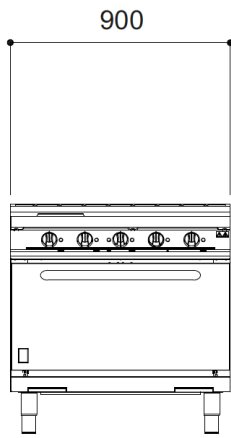

Unit on castors is the same hob height

Measurements *in mm*

**Specification** *details*

Electrical rating (kW)	15.4	
Electrical supply voltage	400V 3N~	
Minimum electrical supply 400V 3N~ (A)	32	
Electrical current split (A)	L1: 22 L2: 22 L3: 22	
Hotplate rating (kW)	3.2 x 2 / 2 x 2	
Total oven element rating (kW)	5	
Oven dimensions (w x d x h - mm)	700 x 535 x 430	
Oven shelf (w x d - mm)	700 x 535	
Gastronorm compatibility	2/1	
Weight (kg)	155	
Packed weight (kg)	173	
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100	
GTIN numbers	On feet	On castors

**Installation notes**

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

