turbofan®

HSERIES

Technical data sheet for H8D-FS-UC HOLDING CABINET - FULL SIZE

8 Tray Electric Under-counter Holding Cabinet DIGITAL CONTROL



STANDARD FEATURES

- Under-counter 810mm unit height
- Designed for individual use or system installed with Turbofan E32D Convection Ovens
- 8 full size 460mm x 660mm / 18" x 26" sheet pan capacity
- 74mm tray spacing
- Compact 735mm width
- 220-240V plug-in 13A cordset fitted
- 1900W cabinet heating
- Full double skin construction
- Digital display Temperature and Timer controls
- Large easy view 20mm high displays
- Electronic temperature control
- 3 hold timers
- Continuous door seal
- Low velocity circulation fan system
- Dual halogen cabinet interior lamps
- Cabinet drain to condensate pan
- 4 dia. 65mm castors with 2 front castors with wheel and swivel lock, 2 rigid rear castors
- 100% recyclable packaging

d

H8D-FS-UC

Unit shall be a Moffat electrically heated Turbofan Under-counter Holding Cabinet. NSF.4 listed. The holding cabinet shall have double skin construction with stainless steel interior and exterior sides, front and top. Door shall be side hinged. Unit shall have capacity for 8 full size 460mm x 660mm / 18" x 26" sheet pans. A single speed fan shall gently and evenly circulate air around the cabinet. Cabinet shall be controlled by a Digital display electronic Temperature and Timer controller. 3 hold timers shall be standard. Holding cabinet shall be mounted on castors, with two rigid castors at rear and two castors, swivel and wheel lock at front. Holding Cabinet shall be fitted with a 13A cordset. Unit shall be supplied in 100% recyclable shipping packaging.



turbofan

H8D-FS-UC 8 Tray Electric Full Size Under- counter Holding Cabinet DIGITAL CONTROL

CONSTRUCTION

304 stainless steel interior cabinet Stainless steel front, sides and top exterior Stainless steel interior side racks Stainless steel frame, side hinged door 5mm thick door glass Stainless steel control panel Aluminised coated steel base and rear panels

CONTROLS

Electronic controls with Digital Time and Temperature displays Large 20mm high LED displays ON/OFF key Cabinet lamp key Temperature set and actual key 3 timer keys Timer range up to 4 hours Timers countdown or count-up modes Temperature range 20- 90°C

CLEANING

Stainless steel top and side exterior panels Removable plug-in oven door seal (no tools required)

SPECIFICATIONS Electrical Requirements 220-240V, 50Hz, 1-phase, 2.05kW, 8.5A 220-240V, 60hz, 1 phase, 2.05kW, 8.5A 13A cordset fitted


External Dimensions Width 735mm Height

810mm including dia. 65mm castors 810mm Depth Nett Weight

81kg Packing Data 99kg 0.80m³ Width 780mm 1080mm Height

Depth 960mm INSTALLATION CLEARANCES Rear 25mm LH Side 0mm RH Side 0mm

CLEARANCE FROM SOURCES OF HEAT A minimum distance of 300mm from the appliance sides is reauired

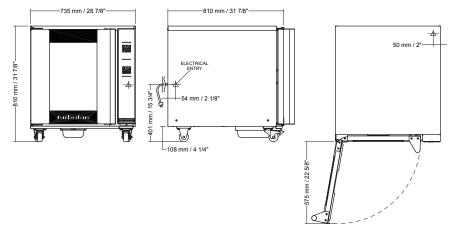

HSERIES

H8D-FS-UC

(• BLUE SEAĽ)

blue-seal.co.uk turbofanoven.com

United Kingdom Blue Seal Limited Unit 67 Gravelly Business Park Gravelly Birmingham B24 8TQ England Telephone 0121-327 5575 Facsimile 0121-327 9711 sales@blue-seal.co.uk www.blue-seal.co.uk

Australia

Moffat Pty Limited 740 Springvale Road Mulgrave, Victoria 3170 Australia Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New Zealand Moffat Limited

Christchurch 45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz www.moffat.co.nz



Quality Management Standard

Designed and manufactured by MOFFAT.

ISO9001 All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd UK.TFN.S.1601