



## J5/N - Lincat Silverlink 600 Natural Gas Free-standing Single Tank Fryer - 1 Basket - W 300 mm - 12.0 kW

Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Gas Fryer.

- ✓ Single tank fryer delivering 22.5kg of chips an hour, perfect for pubs, restaurants and care homes
- ✓ Front mounted controls for safety
- ✓ Thermostatically controlled to give accurate cooking temperatures throughout cooking. Flame failure device and top temperature cut out ensures safe operation.
- ✓ Cool zone collects cooking debris - gives cleaner cooking results and saves money by prolonging the life of the oil
- ✓ Piezo ignition for easy lighting
- ✓ Heavy duty nickel plated baskets for the most demanding of operations
- ✓ Internal drain off tap for easy removal of cooking oil

### Specifications

#### Summary

|                             |                                   |
|-----------------------------|-----------------------------------|
| <b>Brand</b>                | Lincat                            |
| <b>Range</b>                | Silverlink 600                    |
| <b>Power Type</b>           | Gas                               |
| <b>Gas Type</b>             | Natural Gas                       |
| <b>Unit Type</b>            | Free-standing                     |
| <b>Available in UK Only</b> | No                                |
| <b>UK Warranty</b>          | 2 Years Parts and Labour Warranty |
| <b>Export Warranty</b>      | Contact your local dealer         |
| <b>GTIN</b>                 | 5056105105121                     |

#### Power and Performance

|                             |            |
|-----------------------------|------------|
| <b>BTU per Hour</b>         | 40,944     |
| <b>Total Power kW</b>       | 12.0       |
| <b>Temperature Range °C</b> | 110-190    |
| <b>Temperature Control</b>  | Mechanical |

#### Key Specifications

|                           |          |
|---------------------------|----------|
| <b>Number of Baskets</b>  | 1        |
| <b>Number of Tanks</b>    | 1        |
| <b>Gravity Filtration</b> | No       |
| <b>Pumped Filtration</b>  | No       |
| <b>Drain Location</b>     | Internal |

#### Capacity

|                                |   |
|--------------------------------|---|
| <b>Product Output per Hour</b> | 18kg chips -12mm [frozen], 22.5kg chips - 12mm [ch] |
| <b>Capacity Litres</b>         | 12.0  |

#### Weights and Dimensions

|                                  |      |
|----------------------------------|------|
| <b>Unit Height (External) mm</b> | 1060 |
| <b>Unit Width (External) mm</b>  | 300  |
| <b>Unit Depth (External) mm</b>  | 690  |
| <b>Net Weight Kg</b>             | 43   |

#### Supply Connections

|   |        |
|---|--------|
| <b>Requires Installation</b>                              | Yes    |
| <b>Requires Electrical Supply</b>                         | No     |
| <b>Gas Connection BSP</b>                                 | 1/2"   |
| <b>Gas Consumption at full rate Natural m³ per Hour</b>   | 1.14   |
| <b>Gas Pressure Natural mbar</b>                          | 16.3   |
| <b>Total heat input at full rate Natural kW</b>           | 11.5   |
| <b>Total heat input at full rate Natural BTU per hour</b> | 38,900 |




## Shipping

|                  |     |
|------------------|-----|
| Packed Weight Kg | 52  |
| Packed Height cm | 122 |
| Packed Width cm  | 85  |
| Packed Depth cm  | 45  |

## Available Accessories

|             |   |
|-------------|---|
| <b>CH01</b> | Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU   |
| <b>CH02</b> | Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU |

## Technical Picture

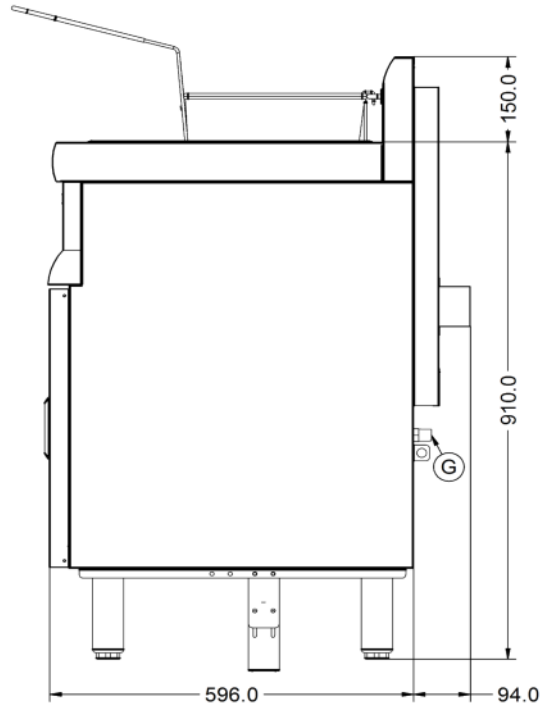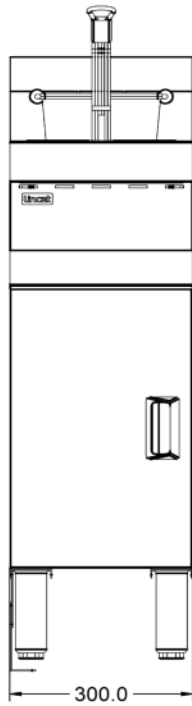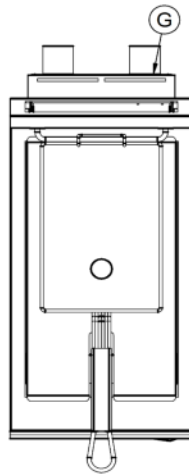



#### Lincat Limited

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



#### Customer Care

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

#### Export Customers

**Tel:** +44 1522 503250  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

#### Opening Hours

**Monday – Friday:**  
8.30am – 5pm