lincat





SLR6/P - Lincat Silverlink 600 Propane Gas Freestanding Oven Range -Legs at Rear - 4 Burners -W 600 mm - 23.8 kW

Power and Performance

Cook a variety of delicious dishes with the powerful Silverlink 600 Gas Oven Range.

- Four powerful gas burners with flame failure device for added safety
- High power gas oven
- Fully pressed and sealed hob tops for easy cleaning
- Robust, easy-to-clean vitreous enamelled cast iron pan supports
- Low level flue maximises working area and enables you to use large stock pots
- Four shelf positions with two removable shelves

Specifications

Summary

Brand Range Power Type Gas Type Unit Type Available in UK Only UK Warranty Export Warranty GTIN	Lincat Silverlink 600 Gas Propane Gas Free-standing No 2 Years Parts and Labour Warranty Contact your local dealer 5056105105176	BTU per Hour Total Power kW Temperature Range °C Temperature Control Rating per Hob kW Oven Rating kW	81,206 23.8 130-250 Mechanical 4.5 5.8
Key Specifications			
Number of Shelves included Number of Shelf Positions Number of Hobs Shape of Hob	2 4 4 Round		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	956	Requires Installation	Yes
Unit Height (External) mm Unit Width (External) mm	956 600	Requires Installation Requires Electrical Supply	Yes No
,		Requires Electrical Supply Gas Connection BSP	
Unit Width (External) mm	600	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate	No
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm	600 600 400 485	Requires Electrical Supply Gas Connection BSP	No 1/2"
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm	600 600 400 485 342	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ^a per Hour Gas Pressure Propane mbar Total heat input at full rate Propane	No 1/2" 1.70
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm	600 600 400 485 342 460	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW	No 1/2" 1.70 37 23.8
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm	600 600 400 485 342 460 342	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ^a per Hour Gas Pressure Propane mbar Total heat input at full rate Propane	No 1/2* 1.70 37
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm	600 600 400 485 342 460 342 W590 × D500	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm	600 600 400 485 342 460 342	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm	600 600 400 485 342 460 342 W590 × D500	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8
Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm Net Weight Kg	600 600 400 485 342 460 342 W590 × D500	Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8

81.3

68.5

Packed Width cm


Packed Depth cm


Page Number:1



SILVERLINK 600

Technical Picture






Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

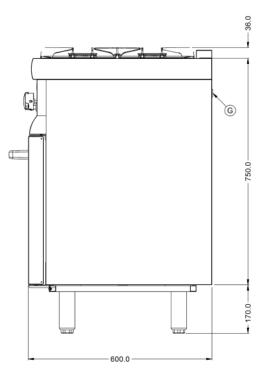

Lincat frifri

Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of



Export Customers

Tel: +44 1522 503250 Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm