



## EB3FX/HC/PB - Lincat FilterFlow FX Counter-top Combined Water Boiler & Chiller with Push Button Dispense - W 250 mm - 3.0 kW

The FilterFlow Combined Water Boiler and Chiller exists because we don't believe you should have to use two different appliances in July and January - it provides hot and cold water on tap, 24/7.

- ✓ Convenient push button operation, ideal for front of house and self service
- ✓ Filtered chilled and hot water on tap 24 hours a day, space saving and economic - no need for a separate boiler and chiller
- ✓ Narrow 250mm footprint saves valuable counter space without compromising capacity or performance
- ✓ Built-in water filtration system improves water quality and reduces scale build-up. High volume, easy change FilterFlow cartridge
- ✓ Easily operated from a large, colour touchscreen display. Menu navigation is quick and easy with the temperature and timer simple to adjust
- ✓ Enhanced diagnostics identify possible causes. The on screen diagnostic information will enable the engineer to identify the parts needed and repair your water boiler at first visit

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>Total Power kW</b>	3.0
<b>Range</b>	FilterFlow	<b>Temperature Range °C</b>	<11 [Cold]; 70-98 [Hot]
<b>Series</b>	FX Counter-top Boiler	<b>IP Rating</b>	IP23
<b>Power Type</b>	Electric	<b>Hourly Output Litres</b>	12 [Cold]; 28 [Hot]
<b>Unit Type</b>	Counter-top	<b>Hourly Output Cups</b>	60 [Cold]; 140 [Hot]
<b>Available in UK Only</b>	No	<b>Temperature Control</b>	Electronic
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105118237		

Key Specifications		Capacity	
<b>Refrigerant Type</b>	R134a	<b>Hot and Cold Water Output</b>	Yes
<b>Outlet</b>	Push Button [Twin Spout]	<b>Rapid Draw Off Litres</b>	5.0 [Hot]
<b>Dispense Lock</b>	No	<b>Rapid Draw Off Cups</b>	25
<b>WRAS Approved</b>	Yes	<b>Capacity Litres</b>	7.0

Weights and Dimensions		Supply Connections	
<b>Unit Height (External) mm</b>	595	<b>Requires Installation</b>	No
<b>Unit Width (External) mm</b>	250	<b>Requires Electrical Supply</b>	Yes
<b>Unit Depth (External) mm</b>	570	<b>UK 3 Pin Plug</b>	Yes
<b>Net Weight Kg</b>	24.8	<b>Requires Hardwiring</b>	No
		<b>Electrical Supply Rating Watts</b>	3,000
		<b>Single Phase Amps</b>	13
		<b>Single Phase Voltage</b>	230
		<b>Water Connection Pressure Bar</b>	2.0-7.0
		<b>Water Connection</b>	3/4"


**Shipping**

Packed Weight Kg	31.7
Packed Height cm	88
Packed Width cm	65
Packed Depth cm	38

**Available Accessories**

DP10	DESCALER POWDER
FC04	Filter Cartridge for Lincat FilterFlow Water Boiler
PI36	INLET CONNECTION HOSE EB

**Technical Picture**

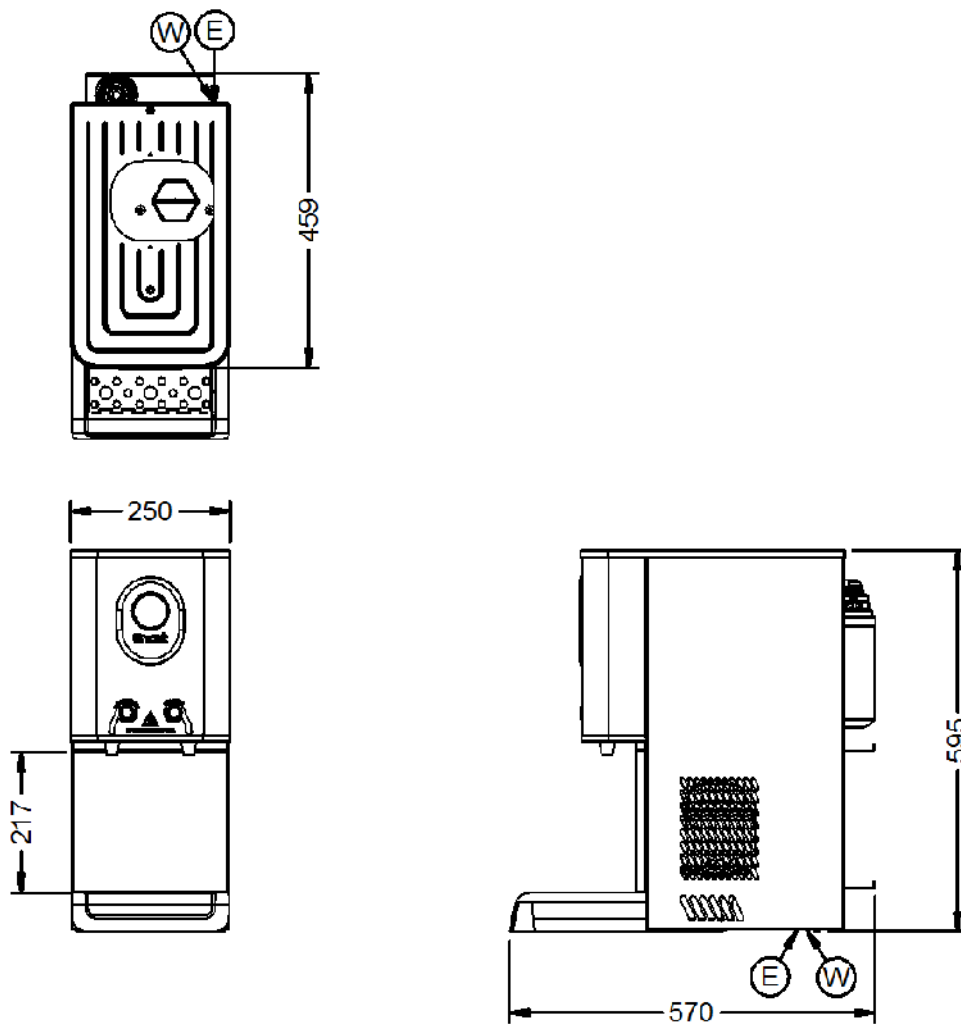



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm