#### lincat

## SILVERLINK 600



ESLR6C - Lincat Silverlink 600 Electric Freestanding Oven Range -Castors at Rear - 4 Plates - W 600 mm - 11.0 kW

Compact 600mm deep footprint - perfect for care homes as well as smaller pubs and restaurants

- Four hotplates 2 x 2.0kW, 2 x 1.5kW with sixposition control knob for each plate - higher power for sautéing at the front, lower power to the rear ideal for simmering
- Automatic power reduction, if the pan boils dry or is removed, prolonging hotplate life
- Easy clean fully pressed and sealed hob

Produce a wide range of delicious food with the large capacity fan assisted oven and four hotplates.

- Powerful 4kW fan assisted oven for uniform heat distribution and consistent cooking
- To suit install requirements, the ESLR6C can be wired as either single or three phase
- Double insulated doors, sode and back panels providing safer operation, greater efficiency and economy
- Castors at rear to enable unit to be pulled out for deeper cleans

#### **Specifications**

Summary		Power and Performance	
Brand	Lincat	Total Power kW	11.0
Range	Silverlink 600	Temperature Range °C	50-250
Power Type	Electric	IP Rating	IP34
Jnit Type	Free-standing	Cooking Area (Width x Depth) mm	600 × 600
Available in UK Only	No	Temperature Control	Mechanical
JK Warranty	2 Years Parts and Labour Warranty	Rating per Hob kW	2 × 2.0, 2 × 1.5
Export Warranty	Contact your local dealer	Oven Rating kW	4.0
GTIN	5056105121336		

#### Rey opecifications

Number of Shelves included				
Number of Shelf Positions				
Number of Hobs				
Shape of Hob				

#### Weights and Dimensions

Unit Height (External) mm
Unit Width (External) mm
Unit Depth (External) mm
Height (Internal) mm
Width (Internal) mm
Depth (Internal) mm
Shelf Dimensions Width mm
Shelf Dimensions Depth mm
Hob Dimensions mm
Net Weight Kg

# .6

932

600

670

428

470

350

455

335

60

600 x 600

#### **Supply Connections Requires Installation** Yes **Requires Electrical Supply** Yes UK 3 Pin Plug No **Requires Hardwiring** Yes **Electrical Supply Rating Watts** 11,000 Single Phase Amps 47.8 Single Phase Voltage 230 **Three Phase Amps** L1=17.4; L2=15.2; L3=15.2 Three Phase Voltage 400



### SILVERLINK 600

#### Shipping


Packed Weight Kg	72.5
Packed Height cm	110
Packed Width cm	70
Packed Depth cm	80

#### **Available Accessories**

SLR6/SB

SPLASHBACK SLR6

#### **Technical Picture**

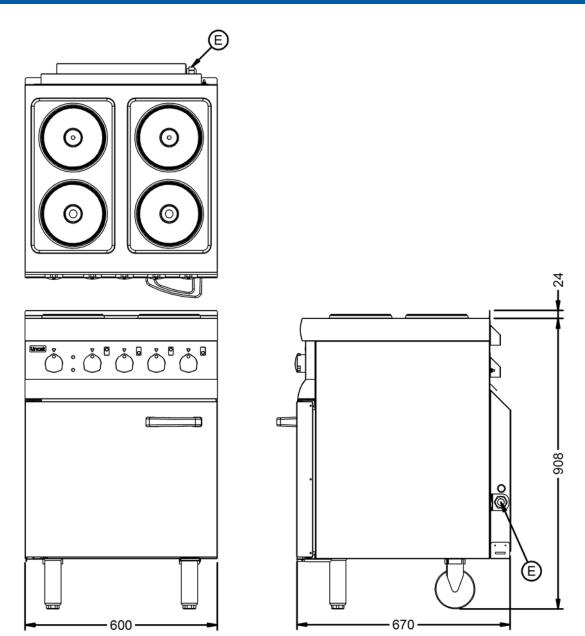



### **SILVERLINK 600**

# Lincat fift

#### Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

#### **Export Customers**

Tel: +44 1522 875536

Email: export@lincat.co.uk

#### **Opening Hours**

Monday – Friday: 8.30am – 5pm