# **Lincat** Combi Ovens



LC110B/N - Lincat Visual Cooking 1.10 Natural Gas Counter-top Combi Oven - Boiler - W 897 mm - 21.0 kW [Gas] + 1.0 kW [Electric] Choose Visual Cooking where high output and precise control are required.

- Intuitive touch display SmartTouch® for programming
- Efficient, controlled production and injection of steam, with hybrid boiler and injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

- Rack timer allowing accurate cooking times for different items on different shelves
- Ideal for menus which require a high volume of steaming
- Two-step safety handle

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	80,000
Range	Lincat Combi Ovens	Total Power kW	1
Series	Visual Cooking	Temperature Range °C	30-300
Power Type	Gas	IP Rating	IPX5
Gas Type	Natural Gas	Temperature Control	Electronic
Unit Type	Counter-top	Oven Rating kW	Steam connection = 21.0; Hot air
Available in UK Only	Yes		connection = 21.0
UK Warranty	2 Years Parts and Labour Warranty		
GTIN	5056105120292		
Key Specifications		Capacity	
WRAS Approved	Yes	Gastronorm Capacity	10 x GN1/1
Гуре of Lighting	Halogen	Portions per Day	150
lumber of Grids included	0		
Weights and Dimensions		Supply Connections	
Jnit Height (External) mm	1075	Requires Installation	Yes
Jnit Width (External) mm	897	Requires Electrical Supply	Yes
Jnit Depth (External) mm	831	UK 3 Pin Plug	Yes
leight (Internal) mm	785	Requires Hardwiring	No
Width (Internal) mm	460	<b>Electrical Supply Rating Watts</b>	1,000
Depth (Internal) mm	690	Single Phase Amps	8.5
Net Weight Kg	175	Single Phase Voltage	230
		Gas Connection BSP	3/4"
		Gas Pressure Natural mbar	18-25
		Total heat input at full rate Natural kW	21
		Total heat input at full rate Natural BTU per hour	80,000
		W-1 0 B	0.5.0

Water Connection Pressure Bar

**Drain Connection** 

**Water Connection** 

2 5-6

3/4"

DN 50 mm



## **Lincat** Combi Ovens

**Shipping** 

Packed Weight Kg 195 Packed Height cm 121 Packed Width cm Packed Depth cm

#### **Available Options**

INSTALLATION

LCO2001 Site Survey & Installation

**COMMISSIONING** 

LCO3001 Commissionina

R/H DOOR INSTALL

LCA3025

LCA4002

LCO2002 Right Hinged Door Installation

#### **Available Accessories**

LCA1006L Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Boiler - Left Hinged Model LCA1006R Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Boiler - Right Hinged Model LCA3003 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep LCA3005 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep LCA3007 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep LCA3009 Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1 (325 x 530 mm) LCA3011 Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm) LCA3012 Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity LCA3013 Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm) LCA3015 Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm) LCA3017 Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm) LCA3019 Lincat Combi Oven Silicone Baking Mat - GN1/1 (325 x 530 mm) LCA3021 Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm) LCA3023 Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm) LCA3024 Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity

LCA4001 Lincat Combi Oven Software Key - Quick Select Recipes (QSR)

Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling LCA5001 Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units LCA6002 Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

LCA6004 Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

LCC1001 Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10

Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity

Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard LCC1002

water areas

Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking LCC1003

Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in LCC1004


hard water areas

LCC2003 Lincat Protect Intense Detergent - 2 x 5I

LCC2005 Lincat Protect Cleaning Package - 6 x 5l Intense Detergent and 2 x 5l Rinse Aid

LCC2006 Lincat Protect Rinse Aid - 2 x 5I

## **Technical Picture**

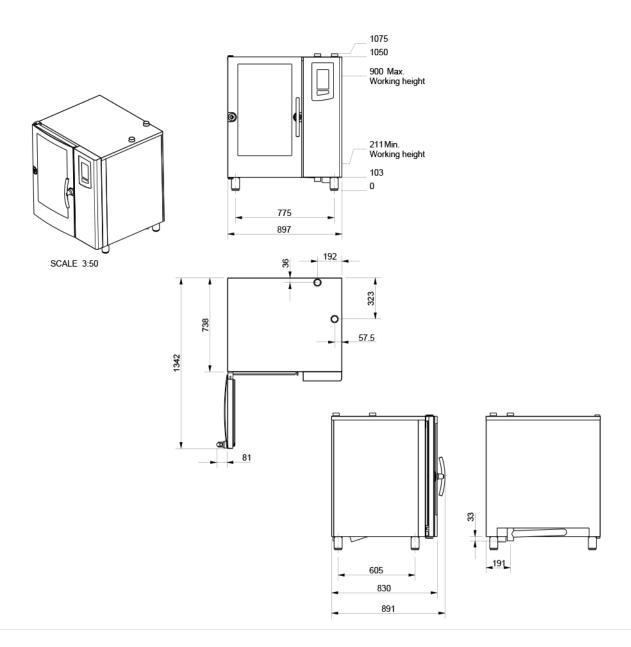



## **Lincat Limited**

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of

## **Customer Care**

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

## **Export Customers**

**Tel:** +44 1522 875536

Email: export@lincat.co.uk

## **Opening Hours**

Monday - Friday:

8.30am - 5pm

