lincat

Lincat Combi Ovens

		AT
	- 79 1	
e	. 199	U

LC110I/P - Lincat Visual Cooking 1.10 Propane Gas Counter-top Combi Oven - Injection - W 897 mm - 21.0 kW[Gas]+1.0 kW[Electric]

- Intuitive touch display SmartTouch[®] for programming
- Immediate production of steam with injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

Choose Visual Cooking where high output and precise control are required.

- Rack timer allowing accurate cooking times for different items on different shelves
- 10 x GN1/1 capacity
- Ideal for menus which require a lower volume of steaming
- Two-step safety handle

Specifications

Brand Lincat Total Power kW 1	
RangeLincat Combi OvensTemperature Range °C30-300	
Series Visual Cooking IP Rating IPX5	
Power Type Gas Temperature Control Electronic	
Gas Type Propane Gas Oven Rating kW Steam connection = N/A;	Hot air
Unit Type Counter-top connection = 21.0	
Available in UK Only Yes	
UK Warranty 2 Years Parts and Labour Warranty	
GTIN 5056105120339	
Key Specifications Capacity	
WRAS Approved Yes Gastronorm Capacity 10 x GN1/1	
Type of Lighting Halogen Portions per Day 150	
Number of Grids included 0	
Weights and Dimensions Supply Connections	
Unit Height (External) mm 1075 Requires Installation Yes	
Unit Width (External) mm 897 Requires Electrical Supply Yes	
Unit Width (External) mm897Requires Electrical SupplyYesUnit Depth (External) mm831UK 3 Pin PlugYes	
Unit Depth (External) mm 831 UK 3 Pin Plug Yes	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNo	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000Depth (Internal) mm690Single Phase Amps8.5	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000Depth (Internal) mm690Single Phase Amps8.5Net Weight Kg175Single Phase Voltage230	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000Depth (Internal) mm690Single Phase Amps8.5Net Weight Kg175Single Phase Voltage230Gas Connection BSP3/4*	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000Depth (Internal) mm690Single Phase Amps8.5Net Weight Kg175Single Phase Voltage230Gas Connection BSP3/4*Gas Pressure Propane mbar30-50Total heat input at full rate Propane21	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000Depth (Internal) mm690Single Phase Amps8.5Net Weight Kg175Single Phase Voltage230Gas Connection BSP3/4*Gas Pressure Propane mbar30-50Total heat input at full rate Propane80,000	
Unit Depth (External) mm831UK 3 Pin PlugYesHeight (Internal) mm785Requires HardwiringNoWidth (Internal) mm460Electrical Supply Rating Watts1,000Depth (Internal) mm690Single Phase Amps8.5Net Weight Kg175Single Phase Voltage230Gas Connection BSP30-50Total heat input at full rate Propane BTU per hour21	



Lincat Combi Ovens

Shipping


Packed Weight Kg	195
Packed Height cm	121
Packed Width cm	100
Packed Depth cm	120

Available Options		
INSTALLATION LCO2001	Site Survey & Installation	
COMMISSIONING LCO3001	Commissioning	
R/H DOOR INSTALL LCO2002	Right Hinged Door Installation	

Available Accessories

LCA1005L	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Injection - Left Hinged Model
LCA1005R	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Injection - Right Hinged Model
LCA3003	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep
LCA3005	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep
LCA3007	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep
LCA3009	Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1 (325 x 530 mm)
LCA3011	Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm)
LCA3012	Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity
LCA3013	Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm)
LCA3015	Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)
LCA3017	Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm)
LCA3019	Lincat Combi Oven Silicone Baking Mat - GN1/1 (325 x 530 mm)
LCA3021	Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm)
LCA3023	Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm)
LCA3024	Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity
LCA3025	Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity
LCA4001	Lincat Combi Oven Software Key - Quick Select Recipes (QSR)
LCA4002	Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling
LCA5001	Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units
LCA6002	Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails
LCA6004	Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails
LCC1001	Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10
LCC1002	Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas
LCC1003	Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking 1.06/1.10
LCC1004	Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas
LCC2003	Lincat Protect Intense Detergent - 2 x 5I
LCC2005	Lincat Protect Cleaning Package - 6 x 5I Intense Detergent and 2 x 5I Rinse Aid
LCC2006	Lincat Protect Rinse Aid - 2 x 5l

Technical Picture

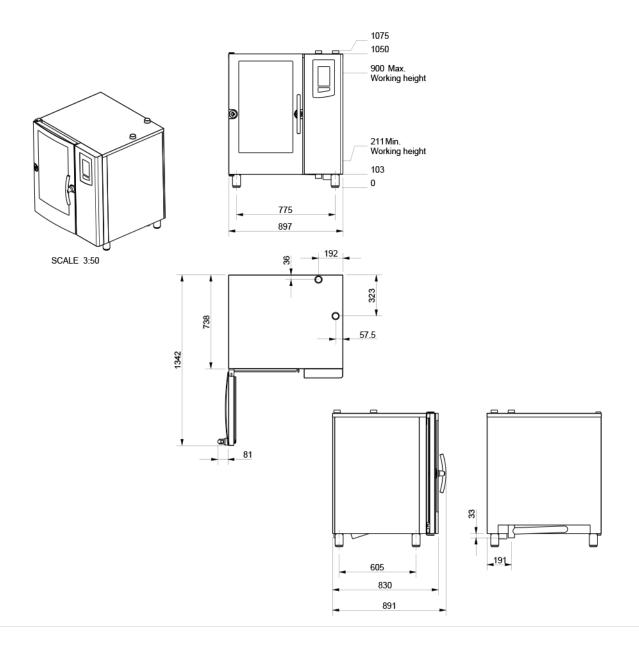

Lincat frifri

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm