



LC220B - Lincat Visual Cooking 2.20 Electric Free-standing Combi Oven - Boiler - W 1122 mm - 60.0 kW

Choose Visual Cooking where high output and precise control are required.

- ✓ Intuitive touch display SmartTouch® for programming
- ✓ Efficient, controlled production and injection of steam, with hybrid boiler and injection steam production
- ✓ CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- ✓ Ability to create cooking programmes with up to 15 steps
- ✓ Rack timer allowing accurate cooking times for different items on different shelves
- ✓ 20 x GN2/1 capacity
- ✓ Ideal for menus which require a high volume of steaming
- ✓ Two-step safety handle

Specifications

Summary Power and Performance

| | | | |
|-----------------------------|-----------------------------------|-----------------------------|--|
| Brand | Lincat | Total Power kW | 60 |
| Range | Lincat Combi Ovens | Temperature Range °C | 30-300 |
| Series | Visual Cooking | IP Rating | IPX5 |
| Power Type | Electric | Temperature Control | Electronic |
| Unit Type | Free-standing | Oven Rating kW | Steam connection = 60.0; Hot air connection = 60.0 |
| Available in UK Only | Yes | | |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| GTIN | 5056105120520 | | |

Key Specifications Capacity

| | | | |
|---------------------------------|---------|----------------------------|------------|
| WRAS Approved | Yes | Gastronorm Capacity | 20 x GN2/1 |
| Type of Lighting | Halogen | Portions per Day | 600 |
| Number of Grids included | 0 | | |

Weights and Dimensions Supply Connections

| | | | |
|----------------------------------|-------|---------------------------------------|---------------------------|
| Unit Height (External) mm | 1877 | Requires Installation | Yes |
| Unit Width (External) mm | 1122 | Requires Electrical Supply | Yes |
| Unit Depth (External) mm | 951 | UK 3 Pin Plug | No |
| Height (Internal) mm | 1,435 | Requires Hardwiring | Yes |
| Width (Internal) mm | 620 | Electrical Supply Rating Watts | 60,000 |
| Depth (Internal) mm | 795 | Three Phase Amps | L1=87.0; L2=87.0; L3=87.0 |
| Net Weight Kg | 380 | Three Phase Voltage | 400 |
| | | Water Connection Pressure Bar | 2.5-6 |
| | | Drain Connection | DN 50 mm |
| | | Water Connection | 3/4" |

Shipping

| | |
|-------------------------|-----|
| Packed Weight Kg | 400 |
| Packed Height cm | 205 |
| Packed Width cm | 110 |
| Packed Depth cm | 125 |

Available Options

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissioning


R/H DOOR INSTALL

LCO2002 Right Hinged Door Installation

Available Accessories

| | |
|----------------|---|
| LCA2004 | Lincat Combi Oven Roll-in Trolley - for Visual Cooking 2.20 - Including 67 mm Rack |
| LCA3003 | Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep |
| LCA3005 | Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep |
| LCA3007 | Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep |
| LCA3009 | Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm) |
| LCA3011 | Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm) |
| LCA3012 | Lincat Combi Oven Imperial Potato Grid - GN1/1(325 x 530 mm) - 28 Potato Capacity |
| LCA3013 | Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1(325 x 530 mm) |
| LCA3015 | Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm) |
| LCA3021 | Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm) |
| LCA3023 | Lincat Combi Oven Rack for Spare Ribs - GN1/1(325 x 530 mm) |
| LCA3024 | Lincat Combi Oven Chicken Grid - GN1/2(325 x 265 mm) - 4 Chicken Capacity |
| LCA3025 | Lincat Combi Oven Chicken Grid - GN1/1(325 x 530 mm) - 8 Chicken Capacity |
| LCA4001 | Lincat Combi Oven Software Key - Quick Select Recipes (QSR) |
| LCA4002 | Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling |
| LCA5002 | Lincat Combi Oven Condenser Hood - for Visual Cooking 2.06/2.10/2.20 not Stacked Units |
| LCA7003 | Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 2.20 - 99 Plate Capacity |
| LCA7004 | Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 2.20 - 117 Plate Capacity |
| LCA7006 | Thermal Blanket for Roll-in Trolley for Visual Cooking 2.20 |
| LCC1002 | Hydro Shield 6000(XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas |
| LCC1004 | Hydro Shield 6000(XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas |
| LCC2003 | Lincat Protect Intense Detergent - 2 x 5l |
| LCC2005 | Lincat Protect Cleaning Package - 6 x 5l Intense Detergent and 2 x 5l Rinse Aid |
| LCC2006 | Lincat Protect Rinse Aid - 2 x 5l |

Technical Picture

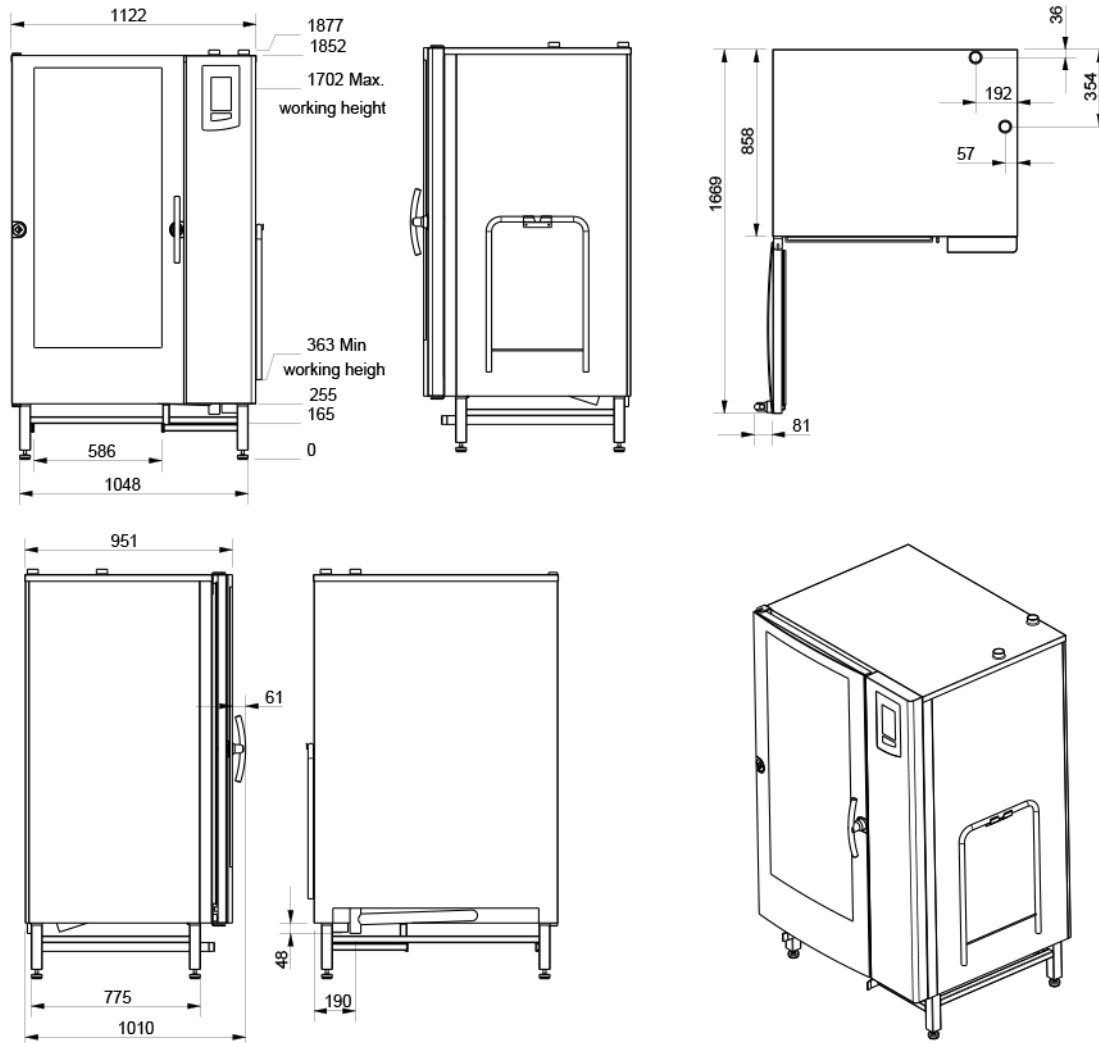

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm