



OG8401/N - Lincat Opus 800 Natural Gas Countertop Chargrill - W 600 mm - 13.8 kW Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.

- Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power

Flame failure protection

Heavy duty radiant caps protect burners

Specifications

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	47,086
Range	Opus 800	Total Power kW	13.8
Power Type	Gas	Cooking Area (Width x Depth) mm	500 × 620
as Type	Natural Gas	Temperature Control	Mechanical
Jnit Type	Counter-top		
vailable in UK Only	No		
JK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
STIN	5056105102816		
ey Specifications		Capacity	
lumber of Heat Zones	3	Product Output per Hour	78×225g[8oz]steaks[chilled]
leights and Dimensions		Supply Connections	
nit Height (External) mm	653	Requires Installation	Yes
Init Width (External) mm	600	Requires Electrical Supply	No
Jnit Depth (External) mm	806	Gas Connection BSP	1/2"
let Weight Kg	80.5	Gas Consumption at full rate Natural m ³ per Hour	1.24
		Gas Pressure Natural mbar	20
		Total heat input at full rate Natural kW	13.8
		Total heat input at full rate Natural BTU per hour	47,087


Packed Weight Kg	92
Packed Height cm	79
Packed Width cm	70
Packed Depth cm	85

lincat



Available Access	ories
CH01	Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU
CH02	Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU
OA8950	Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm
OA8950/C	Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm
RC03M	RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT

Technical Picture

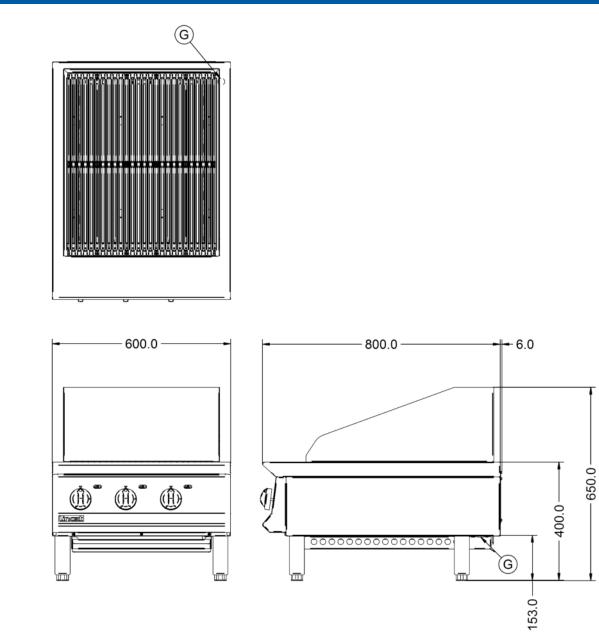

lincat



lincat fift

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm