



P6P4 - Lincat Panther 670 Series Free-standing Hot Cupboard - Plain Top - W 1530 mm - 2.5 kW

A great solution for holding and transporting food at the perfect temperature, the Panther 670 Series Hot Cupboard is designed to fit through narrow doorways, so is ideal for pubs and smaller restaurants as well as nursing and care homes where plated meals are to be transported from the kitchen to the residents.

- 670mm depth allows access through narrow door openings also ideal to fit through narrow corridors
- Ideal for small restaurants, cafes and pubs, as well as nursing and care homes, where the easy transportation of plated meals to diners and residents is a necessity.
- Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 4 x 1/1 GN containers up to 150mm deep.

- Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations
- Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy cleaning
- Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads

Static or Mobile

Mobile

Specifications			
Summary		Power and Performance	
Brand	Lincat	Total Power kW	2.50
Range	Panther	Temperature Range °C	20-99
Series	670 Series	IP Rating	IP24
Power Type	Electric	Temperature Control	Electronic
Unit Type	Free-standing		
Available in UK Only	No		
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105103455		
Key Specifications		Capacity	
Number of Shelves included	2	Plate Capacity	396
Number of Shelf Positions	4		
Heated Base	Yes		
Heated Gantry	No		





Weights and Dimensions		Supply Connections	
Unit Height (External) mm	900	Requires Installation	No
Unit Width (External) mm	1530	Requires Electrical Supply	Yes
Unit Depth (External) mm	670	UK 3 Pin Plug	Yes
Height (Internal) mm	432	Requires Hardwiring	No
Width (Internal) mm	1,345	Electrical Supply Rating Watts	2,500
Depth (Internal) mm	512	Single Phase Amps	10.9
Shelf Dimensions Width mm	1,286	Single Phase Voltage	230
Shelf Dimensions Depth mm	512		
Net Weight Kg	108.5		
Shipping			
Packed Weight Kg	119.35		
Packed Height cm	110		
Packed Width cm	155		
Packed Depth cm	90		

Available Options

Overs	helf	or (Gantry

PG4A PG4A - Ambient Gantry
PG4H PG4H - Heated Gantry
PS4A1 PS4A1 - 1 Ambient Overshelf
PS4A2 PS4A2 - 2 Ambient Overshelves
PS4A3 PS4A3 - 3 Ambient Overshelves
PS4H1 PS4H1 - 1 Heated Overshelf
PS4H2 PS4H2 - 2 Heated Overshelves

PS4H3 - 3 Heated Overshelves

Door Locks

PS4H3

PDL4 - Lockable Door

Corner Guards

PCG - Corner Guards [Set of Four]

Trayslides

PTS4 - Tray Slide

Legs/Castors

PLK PLK - Legs[non chargeable]

Available Accessories

PLK/S PLK/S - LEG KIT [FOR CONVERSION IN THE FIELD]


PPB6 PPB6 - ADDITIONAL PUSHBAR


Technical Picture







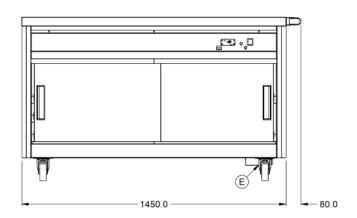





Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm