



HB1 - Lincat Seal Countertop Heated Display Base -1 x 1/1 GN - W 380 mm -0.5 kW The Seal Heated Display Base is an affordable choice where overhead heat and illumination is not required, for example where covered dishes are served.


- Minimum food holding temperature of 72°C
- Thermostatic control allows base heat to be adjusted to suit a variety of food products
- Aluminium surface for energy-efficient heat conduction
- An affordable choice for when overhead heat and illumination is not needed – for example where covered dishes are served
- Robust stainless steel construction hygienic and easy to clean


| Summary | | Power and Performance | |
|---------------------------|-----------------------------------|--|---------------------|
| Brand Range | Lincat Seal | Total Power kW Temperature Range °C | 0.50 68[minimum] |
| Power Type | Electric | IP Rating | IP33 |
| Unit Type | Counter-top | Temperature Control | Mechanical |
| Available in UK Only | No | | |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| Export Warranty | Contact your local dealer | | |
| GTIN | 5056105104308 | | |
| Key Specifications | | Capacity | |
| Heated Base | Yes | Gastronorm Capacity | 1 x GN1/1 |
| Heated Gantry | No | | |
| Weights and Dimensions | | Supply Connections | |
| Unit Height (External) mm | 112 | Requires Installation | No |
| Unit Width (External) mm | 380 | Requires Electrical Supply | Yes |
| Unit Depth (External) mm | 505 | UK 3 Pin Plug | Yes |
| Net Weight Kg | 7.2 | Requires Hardwiring | No |
| | | Electrical Supply Rating Watts | 500 |
| | | Single Phase Amps | 2.2 |
| | | Single Phase Voltage | 230 |
| Shipping | | | |
| Packed Weight Kg | 7.92 | | |
| Packed Height cm | 25 | | |
| Packed Width cm | 70 | | |
| Packed Depth cm | 55 | | |


Technical Picture









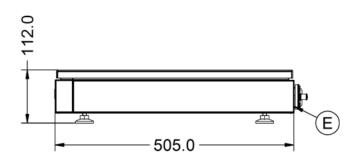



Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm