



Dati Tecnici - Specifications

	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
F120C A		1180	490	10	12.0	4.1	50	110	57	126	0,39
F120C W		1180	450	10	8.3	32.2	50	110	57	126	0,39

24h Produzione Ghiaccio - Ice Production

Raffreddamento ad aria - Air Cooled Unit


Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	102	111	115	120
50°	224	245	253	264
21°	95	104	108	110
70°	209	229	238	242
32°	84	90	94	97
90°	185	198	207	214
38°	75	81	85	87
100°	165	179	187	192

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	97	108	117	120
50°	214	238	258	264
21°	96	106	116	118
70°	212	234	256	260
32°	94	104	111	114
90°	207	229	245	251
38°	87	97	102	105
100°	192	214	225	231



PANNELLO DI CONTROLLO - CONTROL PANEL



CAPACITA' DEPOSITO - BIN CAPACITY

18 kg - 39.6 lbs

DIMENSIONI - DIMENSIONS

WxDxH (mm / inch)

500 x 597 x 694


19 11/16" x 23 8/16" x 27 5/16"



560 x 650 x 970

22" 1/16" x 25" 9/16" x 38" 3/16"

TIPO GHIACCIO - ICE TYPE



PERCENTUALE ACQUA RESIDUA 25%
ICE CONTAINS 25% RESIDUAL WATER

CONDIZIONI USO-OPERATING REQUIREMENTS


Calore espulso / Rejected Heat 1724 W

Volume aria / Air Volume 185 m³/h



220-240/1/50Hz R134a GWP=1430

MIN		MAX	
30 µS/cm		500 µS/cm	
10°C (50°F)		40°C (104°F)	
10°C (50°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	

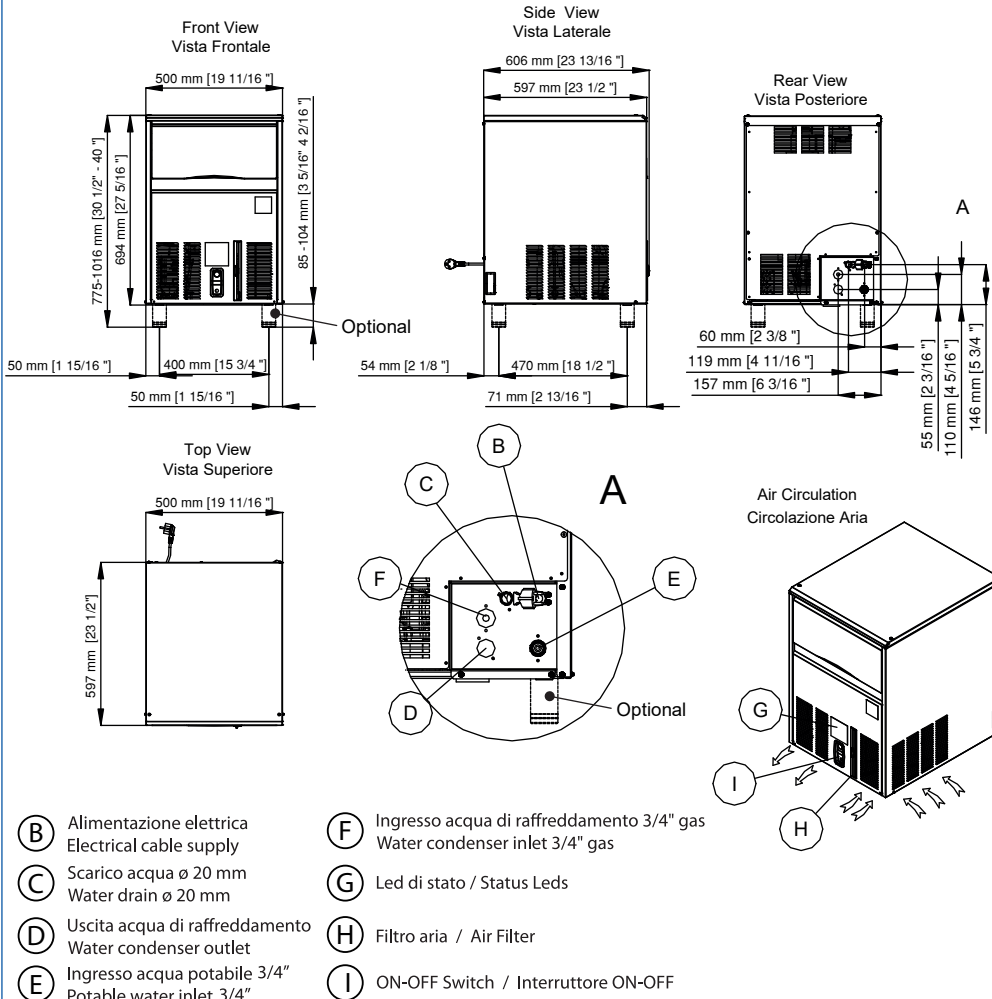

F120C 230V/1N/50Hz Self contain - Ice Flakers