



UCF160A

## Features

- Flake Ice Makers produce fast cooling, energy efficient ice.
- Space-saving 21" wide undercounter design.
- Produces up to 154 lbs of ice per day.
- Built-in storage bin stores up to 55 lbs.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- Ideal for any undercounter or bar application.
- Contemporary, elegant design.

## Space-Saving Solutions

- Front air discharge design for compact spaces.
- True undercounter fits below 34" with short leg option
- Low profile top saves counter space.
- Stores up to 55 lbs of ice.
- Easy front access to ice.
- Removable Air Filter.

## Options & Accessories


Ice Machine Model	WATER FILTERS		
	Manifold		Inline
	System	Replacement	System
UCF160A	IFQ1-S	IOMQ-S	IFI4C or IFI8C
UCF165A			

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Two years Parts and Labor

## Ice Form



FLAKED ICE


UCF160A/UCF165A FLAKE SERIES UNDERCOUNTER



# UCF160A/UCF165A - FLAKE SERIES - UNDERCOUNTER



UCF160A/UCF165A FLAKE SERIES UNDERCOUNTER

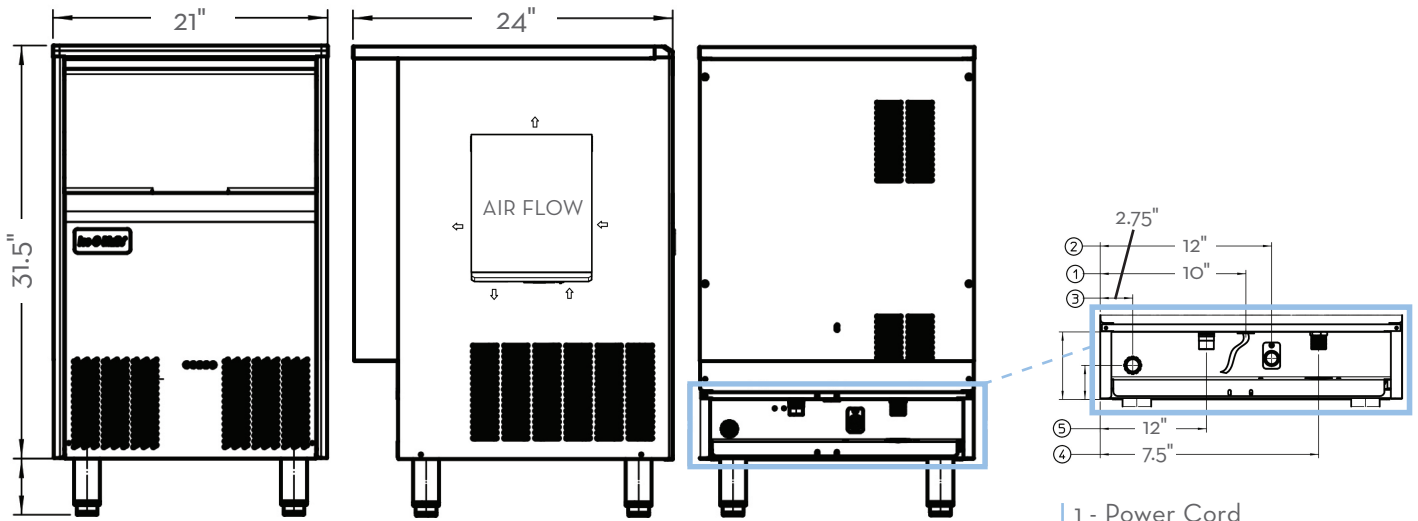


### LEGS INCLUDED

UCF160 - Extends from 4<sup>3</sup>/<sub>8</sub>" to 6<sup>1</sup>/<sub>8</sub>"  
UCF165 - Extends from 3.5" to 5<sup>3</sup>/<sub>8</sub>"

### UCF SHORT LEG OPTION

Extends from 2<sup>1</sup>/<sub>8</sub>" to 2<sup>1</sup>/<sub>2</sub>"



Part No.  
1011411-87

Only available for 60Hz Models

- 1 - Power Cord
- 2 - 3/4" Gas Water Inlet
- 3 - 3/16" Water Drain
- 4 - 3/4" Condenser Water Inlet
- 5 - 3/4" Condenser Water Outlet

## Operating Requirements

	MINIMUM	MAXIMUM
	<b>60 Hz</b>	
Ambient Temp. Range Air	50°F (10°C)	100°F (40°C)
Water Temp.	40°F (5°C)	100°F (40°C)
Water Pressure	14 PSI (1 BAR)	70 PSI (5 BAR)
Electrical Voltage	230/50/1	

## Dimensions

ALL MODELS	
W x D x H (in.)	21 x 24 x 31.5
W x D x H (mm)	535 x 626 x 800

\* Dimensions do not account for the included adjustable legs.

## Specifications

Model Number	Cond. Unit	Ice Production per 24hr			Storage Capacity lbs (kg)	Water Consumption gal/Hr (ltr/hr)	kWh Used per 100 lbs (45 kg) of ice @ 90°F (32°C) air/ 70°F (21°C) water	Voltage Characteristics
		50°F (10°C) air/ 50°F (10°C) water lbs (kg)	70°F (21°C) air/ 50°F (10°C) water lbs (kg)	90°F (32°C) air/ 70°F (21°C) water lbs (kg)				
UCF160A	Air	154 (70)	148 (67)	123 (56)	55 (25)	.85 (3.125)	16 (7.5)	230/50/1
UCF165A	Air	154 (70)	148 (67)	123 (56)	55 (25)	.85 (3.125)	16 (7.5)	230/50/1

### NOTES:

Approx. Shipping Weight lbs (kg): 60 kg  
Refrigerant Type: R134A

All specifications and performance data are subject to normal manufacturing variances.

Ice-O-Matic reserves the right to change the specifications at any time without obligation. Certifications may vary depending on country of origin.