

THREE FLAVOR AUTOMATIC ICE CREAM VENDING MACHINE



ISI-273SH3S

W x D x H inch(mm)
26" (668) x 39" (981) x 66" (1,670)



Feature



SIMPLICITY



PERFORMANCE



RELIABILITY



EXCELLENT TASTE



Direct Motor Drive (operation)

Less noise & Less vibration



Heat Treatment System (Pasteurization)

Pasteurization involves heating dairy products for a period of time to kill bacteria, maintaining dairy products up to two weeks. You can also choose an automatic or manual pasteurization system.



Agitator operation

Keep ice cream mix liquid separation / Circulate the ice cream mix evenly for temperature maintenance



Mix Hopper

One, 17.9 liter (4.72 gallon) / Maintain the temperature of mix, under 5°C (41°F) in Auto & Standby modes



Mass Storage Capacity

The Large Mix Hopper & Cylinder can serve Ice Cream & Yogurt continuously.



Powerful Production Capacity

Oversized compressor cuts down on production time.



Freezing Cylinder

One, 2.7 liter (0.72 gallon) x 2EA



Artificial Intelligence Control System

A.I Control System makes high quality soft serve ice cream.

Dimensions

Dimensions	Net	Gross
Width	26" (668 mm)	33" (847mm)
Depth	39" (981 mm)	46" (1,167 mm)
Height	66" (1,670 mm)	68" (1,715 mm)
Weight	627 lbs (284.5 kg)	786 lbs (356.5 kg)

Certification



7, GEOMDAN-RO 54BEON-GIL, SEO-GU, INCHEON, KOREA


• TEL : +82-32-814-2160 Ext. 210, 220 • FAX : +82-32-814-1798

• WEB : www.icetro.com • E-mail : sales@icemaker.co.kr



THREE FLAVOR AUTOMATIC ICE CREAM VENDING MACHINE

Dimension – Unit : mm (inch)

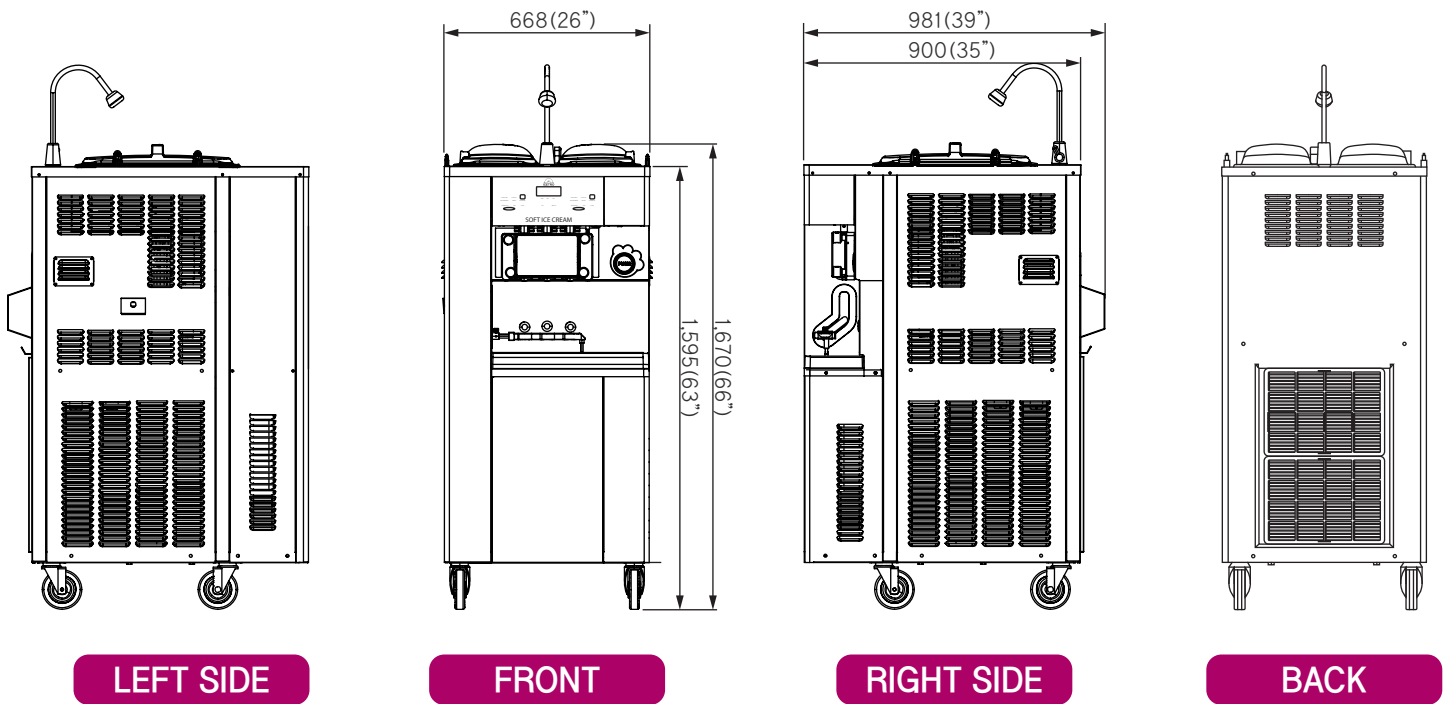

Specification

Model	Mix Hopper Capacity	Cylinder Capacity	Consecutive Dispensing	Dasher Motor	Max. Production
ISI-273SH3S	17.9 liter (4.72 gallon) x 2EA	2.7 liter (0.72 gallon) x 2EA	15~40 cups (100 cc/3.5 oz)	0.75 KW x 2EA	12.8 kg (28.2 lbs/h)
	First Dispensing	Power Consumption	Compressor Capacity	Cooling System	Electrical Option
	7~10 min	4,300 W	1.5 HP x 2EA (R-404A)	Air-Cooled	208~230V/60Hz/3PH 380V/60Hz/3PH 380~420V/60Hz/3PH

※ Production Capacity may vary depending on ambient temperature.


Detail View



Simple & Easy to access operating / control system on the front LCD touch panel



Pull out to remove the Air filter at the rear side

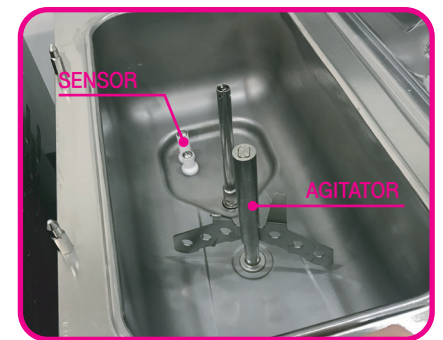

Agitator Operation
Automatically Detect MIX OUT & MIX LOW by the sensor

※ Design and Specification are subject to change without notice.