



# ISI-273SHN(P)



W x D x H

inch(mm)

21" (530) x 37" (930) x 62" (1,575)

## Feature



**SIMPLICITY**



**PERFORMANCE**



**RELIABILITY**



**EXCELLENT TASTE**



**Direct Motor Drive (operation)**

Less noise & Less vibration



**Heat Treatment System (Pasteurization)**

Pasteurization involves heating dairy products for a period of time to kill bacteria, maintaining dairy products up to two weeks. You can also choose an automatic or manual pasteurization system.



**Agitator operation**

Keep ice cream mix liquid separation / Circulate the ice cream mix evenly for temperature maintenance



**Mix Hopper**

One, 2.7 liter (0.72 gallon) / Maintain the temperature of mix, under 5°C (41°F) in Auto & Standby modes



**Powerful Production Capacity**

Oversized compressor cuts down on production time.



**Various Function**

Defrost / Regeneration / Boiling Function



**Artificial Intelligence Control System**

A.I Control System makes high quality soft serve ice cream.



**(P)\*Model has Air Pump System**

Air Pump increase overrun which makes Soft Serve Ice Cream much smoother and softer

## Dimensions

Dimensions	Net	Gross
Width	21" (530 mm)	25" (630 mm)
Depth	37" (930 mm)	41" (1,030 mm)
Height	62" (1,575 mm)	73" (1,860 mm)
Weight	522 lbs (237 kg)	540 lbs (245 kg)

### Certification



7, GEOMDAN-RO 54BEON-GIL, SEO-GU, INCHEON, KOREA


• TEL : +82-32-814-2160 Ext. 210, 220 • FAX : +82-32-814-1798

• WEB : www.icetro.com • E-mail : sales@icemaker.co.kr



# PREMIUM HEAT TREATMENT SOFT ICE CREAM MACHINE

## Dimension – Unit : mm (inch)

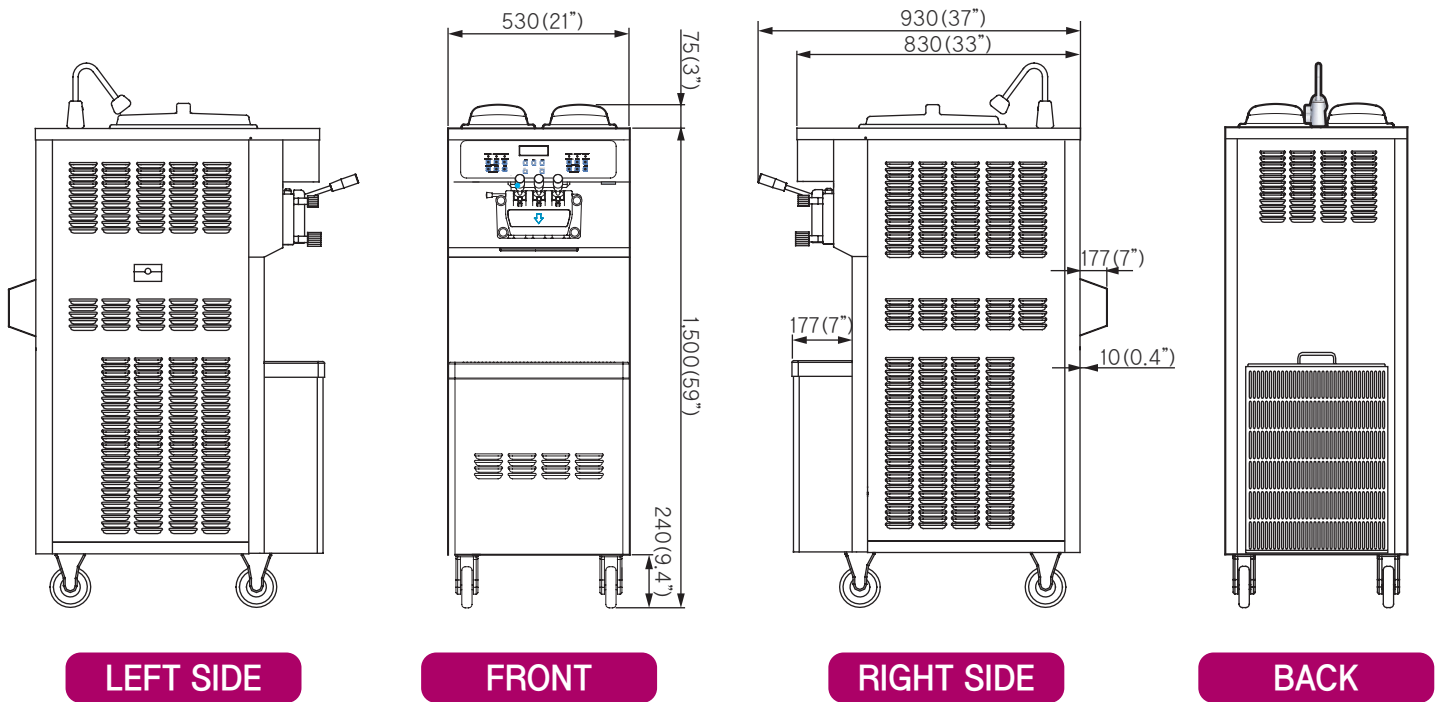

## Specification

Model	Mix Hopper Capacity	Cylinder Capacity	Consecutive Dispensing	Dasher Motor	Max. Production
ISI-273SHN(P)	12.5 liter (3.3 gallon) x 2EA	2.7 liter (0.72 gallon) x 2EA	∞ cups (100 cc/3.5 oz)	0.75 KW x 2EA	42 kg (92.6 lbs/h)
	First Dispensing	Power Consumption	Compressor Capacity	Cooling System	Electrical Option
	7~11 min	4,200 W	1.5 HP x 2EA (R-404A)	Air-Cooled	208~230V/60Hz/3PH 380V/60Hz/3PH 380~420V/60Hz/3PH

※ Production Capacity may vary depending on ambient temperature.

## Detail View



Simple & Easy to access operating / control system on the front LCD touch panel



Pull out to remove the Air filter at the rear side



Agitator Operation  
Automatically Detect MIX OUT & MIX LOW by the sensor

※ Design and Specification are subject to change without notice.



7, GEOMDAN-RO 54BEON-GIL, SEO-GU, INCHEON, KOREA

• TEL : +82-32-814-2160 Ext. 210, 220 • FAX : +82-32-814-1798

• WEB : www.icetro.com • E-mail : sales@icemaker.co.kr