

# HSM Series

## Heated Shelf Merchandiser



HSM-24/3S/T & HSM-24/5S/T

CE

Featuring exclusive Halo Heat® technology, Alto-Shaam heated shelf merchandisers provide precise, top and bottom heat for the highest quality prepared food– and longer hold times.

Hold a variety of grab-and-go products, including rotisserie chickens, pizza, sandwiches, and more. Drive foodservice profits with hot, ready-to-eat meals. Convenient, fresh meals are displayed in an aesthetically pleasing, customizable merchandiser.

**Experience better quality food** with gentle, even and precise Halo Heat® fanless technology to keep food from drying out.

**Flexibility to control individual shelf temperatures** allows you to hold a variety of products at the proper temperature.

**Boost impulse sales** with LED-lighted shelves, customized branding, backlit interchangeable graphics, pricing rails and window sides.

**Simple operation and easy cleaning** keeps delis and grab-and-go areas operating smoothly.

**Easy-to-load shelves** – pass-through option available for added convenience.

**Made in the USA** with a commitment to quality. Alto-Shaam is ISO 9001:2015-certified.

### Standard Features

- Adjustable thermostat per shelf with a heat-on indicator light
- Latched access panel on the front of the merchandiser
- Four casters for floor models
- Four adjustable feet for countertop model



HSM-24/5S/T



HSM-24/3S/T

### Configurations (select one)

#### Model

- HSM-24/3S/T
- HSM-24/5S/T

#### Electrical

- 230V, 1PH

#### Door Options

- None (reach-in models only)
- Rear slide (pass-through models only)
- Rear swing (pass-through models only)
- Front swing (reach-in and pass-through models)

#### Legs or Casters (floor standing)

- 102–153mm adjustable legs [5025454]
- 76mm casters [Standard]

#### Legs or Display Base (countertop)

- 102–153mm adjustable legs: [Standard] [5026182]
- HSM-24/3S-CT Display Base, with casters [5026172]
- HSM-24/3S-CT Display Base, with legs [5026180]

#### Accessories (select all that apply)

Note: Unit ships without graphics unless selected

- Signage panel, POP Display
- Signage panel, shelf – Rotisserie Chicken
- Signage panel, shelf – Hot Sandwiches
- Signage panel, shelf – Barbecue Ribs
- Signage panel, shelf – Hot & Tasty
- Signage panel, shelf – Grab & Go
- Signage panel, shelf – Hot & Fresh
- Shelf insert for magnetic signage panels, HSM-24/5S [1027304].  
Magnetic signage panels to be provided by customer.

qty



**18** HSM-24/3S/T: Three (3) 530mm width shelves, fifteen (15) sandwiches or six (6) chicken boats with dome cover per shelf.

CAPACITY

**30** HSM-24/5S/T: Five (5) 530mm width shelves, sixteen (16) sandwiches or six (6) chicken boats with dome cover per shelf.




HSM-24/3S/T: 21 kg                      7 kg per shelf

HSM-24/5S/T: 35 kg                      7 kg per shelf





# HSM Series

## HSM-24/5S/T



**Shelf Dimensions (W x D)**  
 ① = Overall ② = Heated Surface  
 ① 528mm x 523mm  
 ② 503mm x 498mm

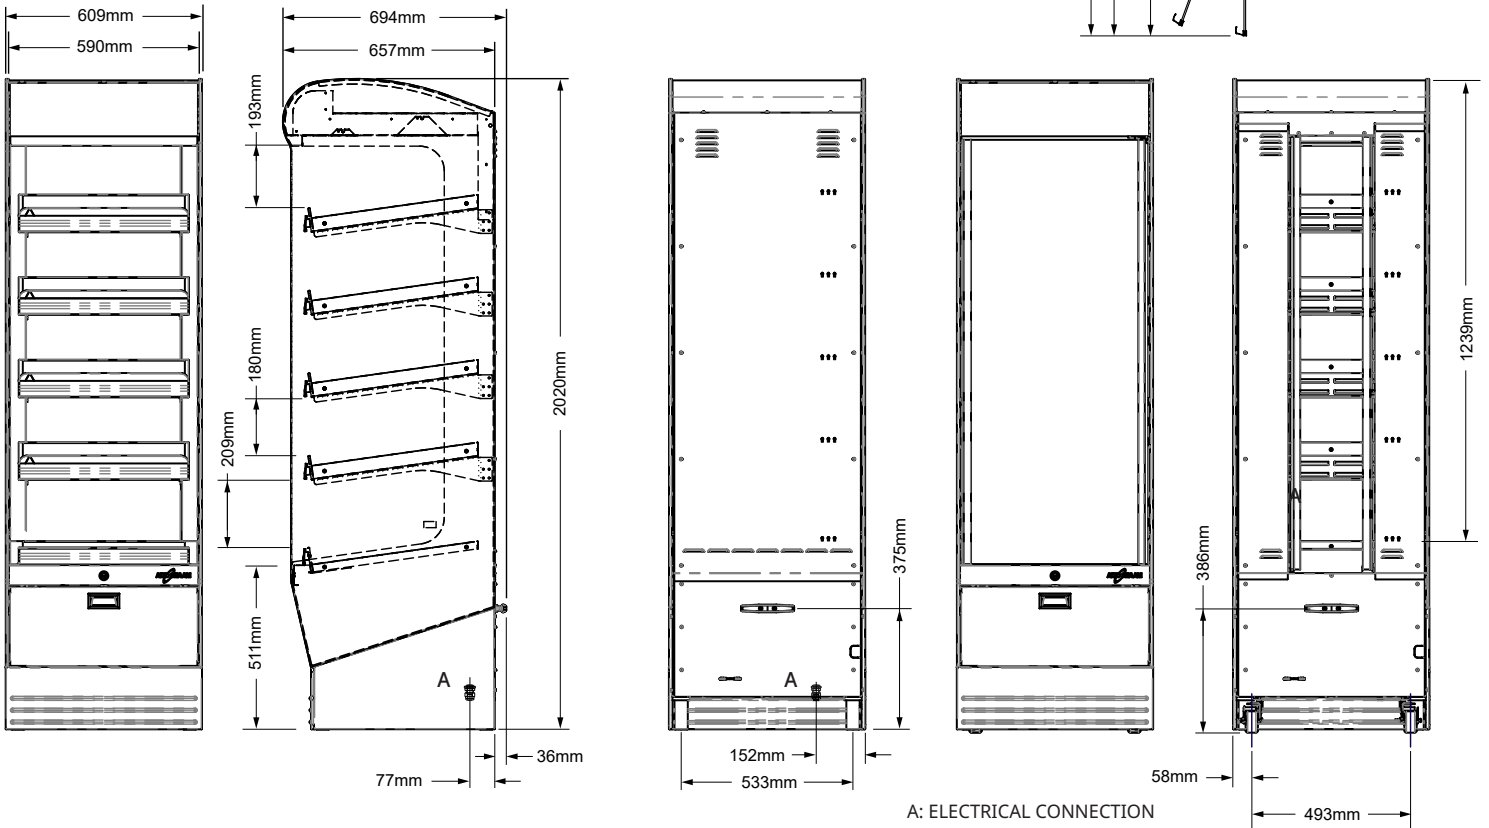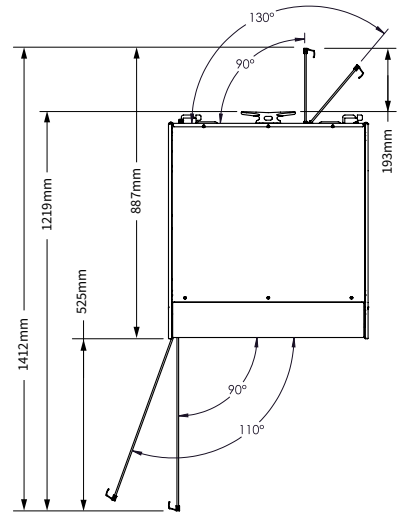

**Model**  
HSM-24/5S/T

**Exterior (H x W x D)**  
2020mm x 609mm x 694mm

**Net Weight**  
184 kg

HSM-24/5S/T

**Ship Dimensions (L x W x H)\***  
914mm x 914mm x 2261mm

**Ship Weight\***  
249 kg

\*Contact factory for details.





HSM-24/5S/T	V	Ph	Hz	Awg	IEC	A	Breaker (A)	kW	Plug Configuration	Residual Current Device*
230V	230	1	50/60	—	1.5	10.97	16	2.63	No cord/no plug	Type B





Electrical connections must meet all applicable federal, state, and local codes.  
 Dedicated circuit required.  
 \* Recommended

# HSM Series

## HSM-24/3S/T

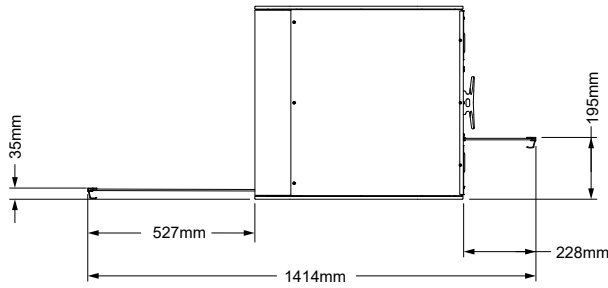

**Shelf Dimensions (W x D)**  
 ① = Overall ② = Heated Surface  
 ① 528mm x 523mm  
 ② 503mm x 498mm

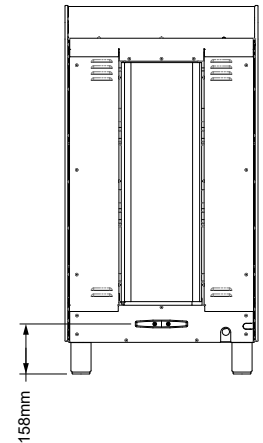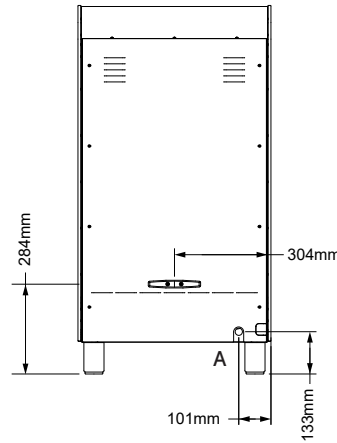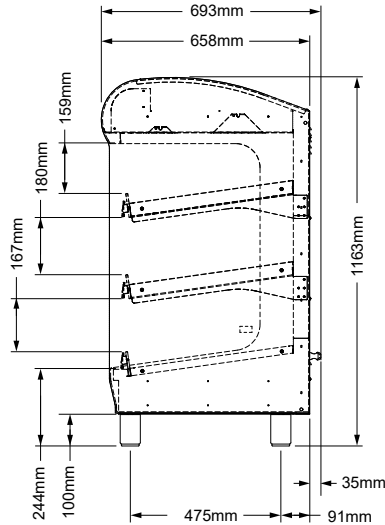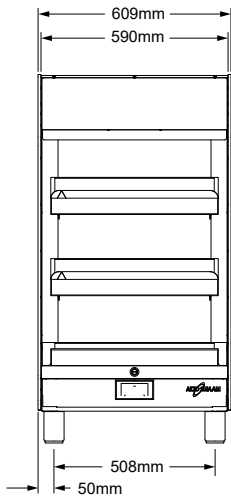

A: ELECTRICAL CONNECTION

<b>Model</b>	<b>Exterior (H x W x D)</b>
HSM-24/3S/T	1163mm x 609mm x 693mm
	<b>Ship Dimensions (L x W x H)*</b>
HSM-24/3S/T	914mm x 914mm x 1651mm

<b>Net Weight</b>
113 kg
<b>Ship Weight*</b>
136 kg

\*Contact factory for details.



**CLEARANCE**

- Rear: 102mm
- Recommended: 457mm for service access.
- Charges associated with inadequate service access are not covered under warranty.



**CHECK FIRST**

- Merchandiser must be installed level.
- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.



**ELECTRIC**

HSM-24/3S/T	V	Ph	Hz	Awg	IEC	A	Breaker (A)	kW	Plug Configuration	Residual Current Device*
230V	230	1	50/60	—	1	6.58	16	1.58	No cord/no plug	Type B

Electrical connections must meet all applicable federal, state, and local codes.  
 Dedicated circuit required.  
 \* Recommended

**CONTACT US**

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)