

item #	
model #	
project #	
sis#	
aia #	



CSD001E Cook & hold oven with drawers

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Handles to carry by hand
- Ergonomic and fully built-in drawers handle with magnetic closure

FUNCTIONAL FEATURES

- Electronic control of the time, temperature and core probe
- Operating temperature 30° ÷ 120°C
- Two adjustable humidity vents: on the drawer and rear wall
- Designed for stacking
- Chamber with safety thermostat

STANDARD SUPPLY

- Removable GN1/1 tray racks
- Internal core probe




TECHNICAL INSTALLATION DIAGRAM


Electricity supply cable inlet




Adjustable vent for release of excess humidity



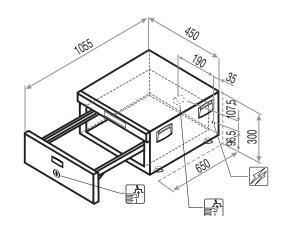



Overall dimensions (W x D x H) - mm	450 x 650 x 300h	Working temperature [°C]	30÷120
Trays capacity	1 GN 1/1 (150h)	Containers capacity distance [mm]	1 GN 1/1 (150)
Power kW	0,7	Containers max height [mm]	150 (h)
Power supply	AC 230V 50 Hz	Product max capacity [kg]	6
Rated voltage [Vac]	230	Net weight	31
Total input [Kw]	0,7		
Amps. [A]	3,1		

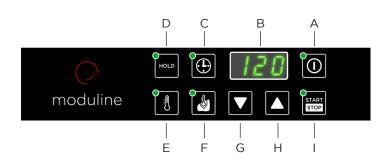

- A ON/OFF switch
- B Display
- C Time selection key
- D Keeping warm or regenerating mode programming keys
- E Temperature selection key
- F Core probe on/off key
- G Temperature decrease key
- H Temperature increase key
- I START/STOP key

MODULINESRL

Connecting wire

min. section (type H07 RN-F) [mm²] 3 x 1