



## RRD101E

### Refrigerated and regeneration trolley (combined)

#### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- All-around rubber bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Ventilated cooling provided by stainless steel evaporator
- Ecological compressor units (R404A)
- Snap-shut door
- Mounted on four 125mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

#### FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding
- Simplified, user-friendly control
- Operating temperature: 0°C - 160°C
- Manual humidity vent
- Combined cavity periodic reversal of direction of rotation of the fans for better cold/hot air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat
- Delayed start timer

#### STANDARD SUPPLY

- Removable GN 1/1 or 600x400 tray racks

#### OPTIONS & ACCESSORIES

- Core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Automatic humidity vent (Climachef)
- Stainless steel plate baskets
- USB port saving device HACCP
- Multipoint core probe
- Speedgrade fan speed recuction system
- External hand shower


**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



# moduline

<b>Overall dimensions</b> (W x D x H) - mm	890 x 815 x 1640h	<b>Rated voltage</b> [Vac]	3N - 400
<b>Trays capacity</b>	10 x GN 1/1 o 600 x 400	<b>Total input</b> [Kw]	7
<b>Plates capacity</b> Plates ø 230 - 260	20	<b>Amps.</b> [A]	10,1
<b>Power</b> [kW]	7	<b>Connecting wire</b> min. section (type H07 RN-F) [mm <sup>2</sup> ]	5 x 1,5
<b>Power supply</b>	3N AC 400V 50 Hz		

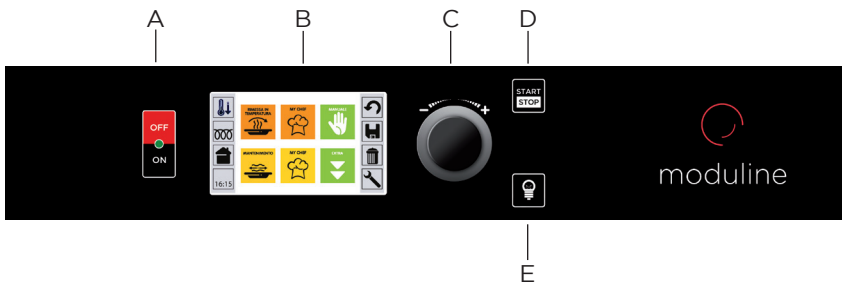

- A ON/OFF switch
- B Display Touch Screen
- C Setting knob and select "ENTER"
- D "START/STOP" button
- E Chamber light button

## MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it