cossiga



Drainage System Options


- Plastic bottle -manual empty
- Pump to waste
- Electronic evaporator pan


- Stainless steel construction
- Four adjustable shelves
- Ticket strips on shelves
- Shelf mounted air curtains
- Under shelf and canopy LED lights
- Pull down night blind
- Forced air circulation
- Integral condenser
- Removable front grill panel
- Roll in on castors
- Climate class M1
- Hinged front doors optional




Shown with optional frameless hinged double glazed front doors

sold as accessory kit





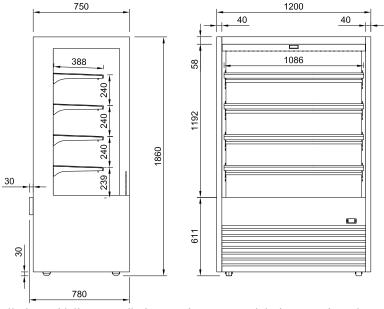

CARINET DIMENSIONS & SPECIFICATIONS

CADINE	Prior to installation see, install														tion guidelines, ventilation requirements and drainage options documents						
MODEL	CABINET		SHELVING		OPERATING TEMP	SHELF	BASE TRAY	DISPLAY REFRIGERANT F		FREQUENCY				CONNECTION ECTRICAL POWER CORD 2200MM		PACKED FOR SHIPPING					
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											NZ/AUS 10 AMP						WEIGHT [KG]	
DTGOR12	1200	780	1860	282	4 + BASE	-1 +5	1086 X 386	1120 x 453	2.18	R290	50/60 HZ	0.94 / 4.5	17.28	3 PIN PLUG	3 PIN PLUG	220-240V	1300	830	2030	292	

Maximum shelf load weight 15kg spread evenly



