

INDUCTION WOK 450mm

IN511W3-B, IN511W3-LS, IN511W3-CB, IN511W5-B, IN511W5-LS, IN511W5-CB

- **Heavy-duty construction**
- **300mm round induction wok**
- **3.5kW or 5kW models**
- **Automatic pan detection switches induction off when wok pan removed**
- **3 models of base unit**
- **Stainless steel exterior**
- **Easy clean**
- **Easy service**
- **Fully modular**



IN511W3(5)-LS

Induction Options

W3 - 3.5kW single phase

W5 - 5kW three phase

Overall Construction

Cooktop

- Welded hob with 2.0mm stainless steel hob top
- Splashback and side panels 1.2mm stainless steel
- Front panels 0.9mm stainless steel
- 6mm thick ceramic glass wok hole

Bench mount (supplied as – B model)

- Four 63mm dia. heavy-duty 1.2mm 304 stainless steel bench legs with adjustable feet
- Adjustable height 80mm – 105mm

Leg stand (supplied as – LS model)

- Fully modular for matched suite finish
- Framed top for connection to Cooktop
- 63mm dia. heavy-duty 1.2mm 304 stainless steel legs with two adjustable feet at front and two rollers at rear
- Fully modular framed stand shelf with 0.9mm 304 stainless steel finish
- Quick assembly design

Cabinet base (supplied as – CB model)

- Fully modular for match suite finish
- Double skin 0.9mm 304 stainless steel interior and exterior
- 63mm dia. heavy-duty 1.2mm 304 stainless steel legs with two adjustable feet at front and two rollers at rear

Controls

- Large easy use control knob
- Variable power control
- Heating ON indicator light including wok pan detection indication
- Error mode indicator light

Cleaning and Servicing

- All models with easy clean stainless steel external finish
- Fully sealed cooking surface
- Removable full stainless steel air intake filter (induction cooling)
- Front service access

INDUCTION WOK 450mm

IN511W3-B, IN511W3-LS, IN511W3-CB, IN511W5-B, IN511W5-LS, IN511W5-CB

Specifications

Cooktop

3.5kW induction wok
or
5.0kW induction wok
Ø 300mm induction

Electrical requirements

IN511W3
3.5kW, 220-240V, 50/60Hz, 1P+N+E
16A

IN511W5
5.0kW, 380-415V, 50/60Hz, 3P+E
8A / phase

Electrical connection

130mm from LH side, 30mm from rear,
635 from floor

Dimensions

Bench model
Width 450mm
Depth 812mm
Height 415mm
Incl. splashback 585mm

All models (excluding Bench model)

Width 450mm
Depth 812mm
Height 915mm
Incl. splashback 1085mm

Nett weight

88kg


Packing data

0.54m³, 130kg
Width 495mm
Depth 865mm
Height 1255mm


Options

Castors
Plinth mounting


IN511W-B

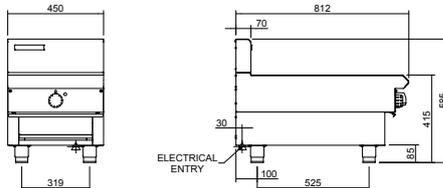


IN511W-LS

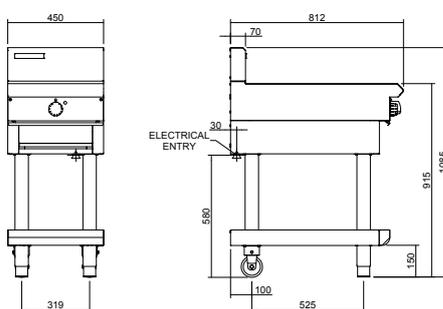

IN511W-CB

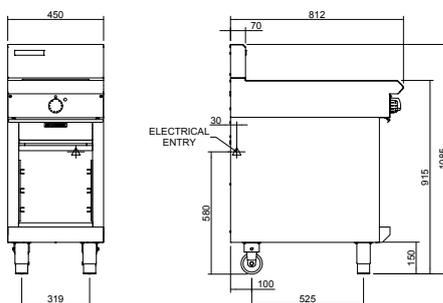

IN511W3, IN511W5



www.blue-seal.co.uk

United Kingdom
blue-seal.co.uk
Blue Seal Limited
Unit 67
Gravelly Business Park
Gravelly
Birmingham B24 8TQ
England
Telephone 0121-327 5575
Facsimile 0121-327 9711
sales@blue-seal.co.uk

Australia
moffat.com.au
Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz
Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

International
moffat.com
international@moffat.co.nz



Designed and manufactured by



ISO9001

All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



Copyright Moffat Ltd.
UK.BS.01.23

an Ali Group Company



The Spirit of Excellence