


Upright Cabinets

# T-23G-HC~FGD01

 Upright Foodservice Refrigerator, 1 Full Glass Swing Door



Dimensions		Build		Technical	
External Width (mm)	686	Door Description	1 Full Glass Swing Door	Refrigerant	R290
External Depth (mm)	750	Door Opening	Right (standard) or Left.	Voltage / Frequency / Phase	220-240V/50-60Hz/1
External Height (mm)	2074	Exterior Construction	Stainless steel front, aluminium sides & rear	Amps	1.3
Exclusions	Depth does not include 42 mm for door handle or 13 mm for rear access panel.	Interior Construction	Clear coated aluminium, stainless steel base	Wattage	299
Net Volume (Litres)	438	Air Intake Position	Front	Temperature Class	M1
Gross Volume (Litres)	651	Ventilation Position	Rear	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Display Area (m <sup>2</sup> )	0.69	Clearance Required	26 mm rear, zero sides	Testing Standard	EN 23953
Supplied Shelves	4	Cord Length (Meters)	2.74	EEC	A
Shelf Size (L x D mm)	582 x 591	Internal Lighting	LED	EEl	8.5
Internal Net Height (mm)	1300	Standard w/ Locks	standard	kWh/24hr	1.64
Unpackaged Weight (kg)	132			kWh/Annum	602
Packaged Weight (kg)	143			Defrost Type	Auto
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134				
Supplied Supports	ø 64 mm castors (83 mm height)				



Specifications subject to change without notice.  
 Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland [0800 783 2049](tel:08007832049)  
 EMEA [+41 61 563 07 05](tel:+41615630705)  
 Australia [+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# T-23G-HC~FGD01

🇬🇧 Upright Foodservice Refrigerator, 1 Full Glass Swing Door

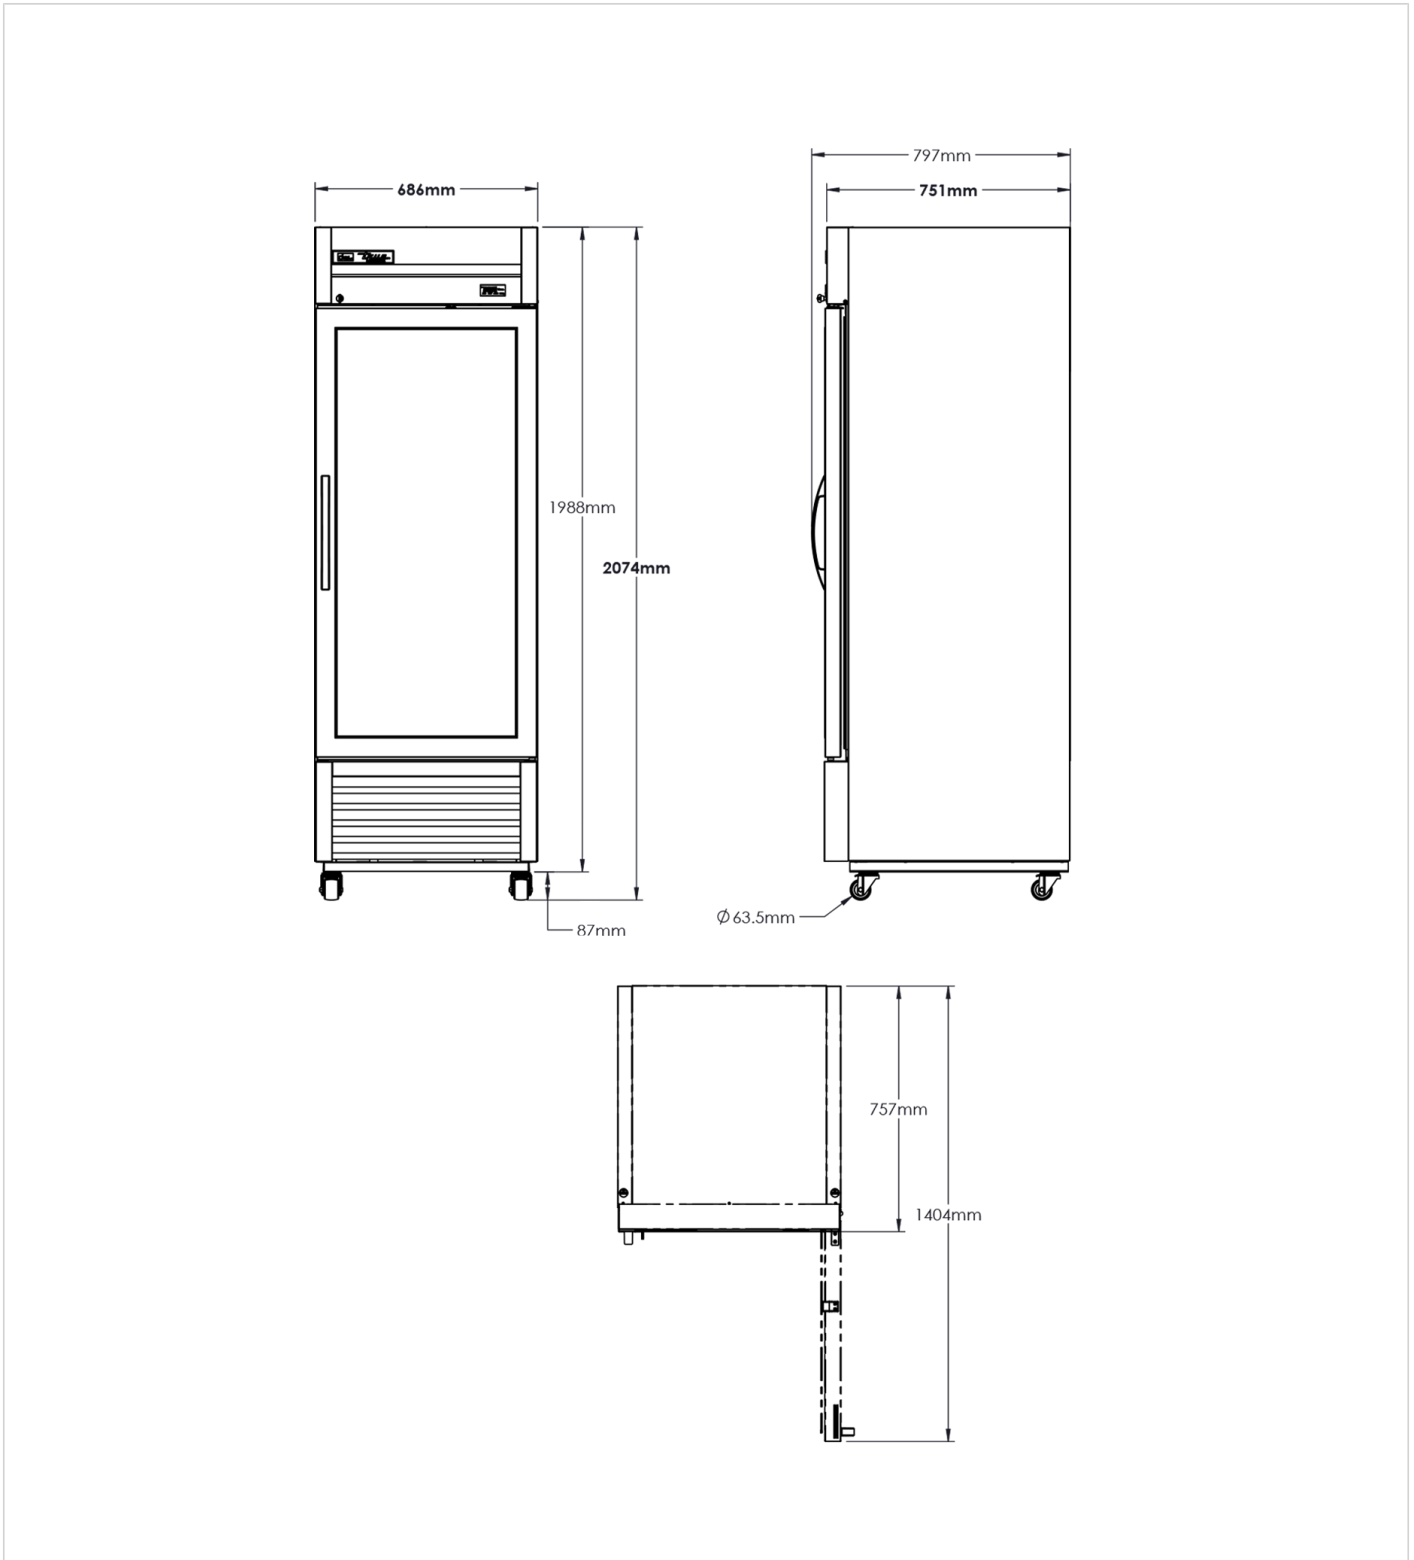

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)  
EMEA [+41 61 563 07 05](tel:+41615630705)  
Australia [+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

