

Glass Door Display

# TSD-09G-HC-LD

🇬🇧 Counter-Top Retail Merchandiser Refrigerator, 2 Glass Slide Doors



Dimensions		Build		Technical	
External Width (mm)	913	Door Description	2 Full Glass Slide Doors	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	532	Exterior Construction	Aluminium front, sides and rear	Refrigerant	R290
External Height (mm)	911	Interior Construction	Clear coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 10 mm for door handle or 13 mm for rear access panel.	Air Intake Position	Right side	Amps	1.5
Net Volume (Litres)	140	Ventilation Position	Rear	Wattage	345
Gross Volume (Litres)	232	Clearance Required	26 mm rear, 26 mm right side.	Temperature Class	M2
Display Area (m <sup>2</sup> )	0.41	Cord Length (Meters)	2.74	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	3	Internal Lighting	LED	Testing Standard	EN 23953
Shelf Size (L x D mm)	Two 807 x 345 + One 807 x 191	Standard w/ Locks	Not Standard. Options available.	EEC	B
Internal Net Height (mm)	720			EEL	12.5
Unpackaged Weight (kg)	89			kWh/24hr	1.75
Packaged Weight (kg)	100			kWh/Annum	641
Packaged Dimensions (W x D x H mm)	1016 x 623 x 1245			Defrost Type	Auto
Supplied Supports	Leg Levellers (Castors supplied separate)				



Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland [0800 783 2049](tel:08007832049)  
EMEA [+41 61 563 07 05](tel:+41615630705)  
Australia [+61 2 9619 9999](tel:+61296199999)


[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



Glass Door Display

# TSD-09G-HC-LD

🇬🇧 Counter-Top Retail Merchandiser Refrigerator, 2 Glass Slide Doors

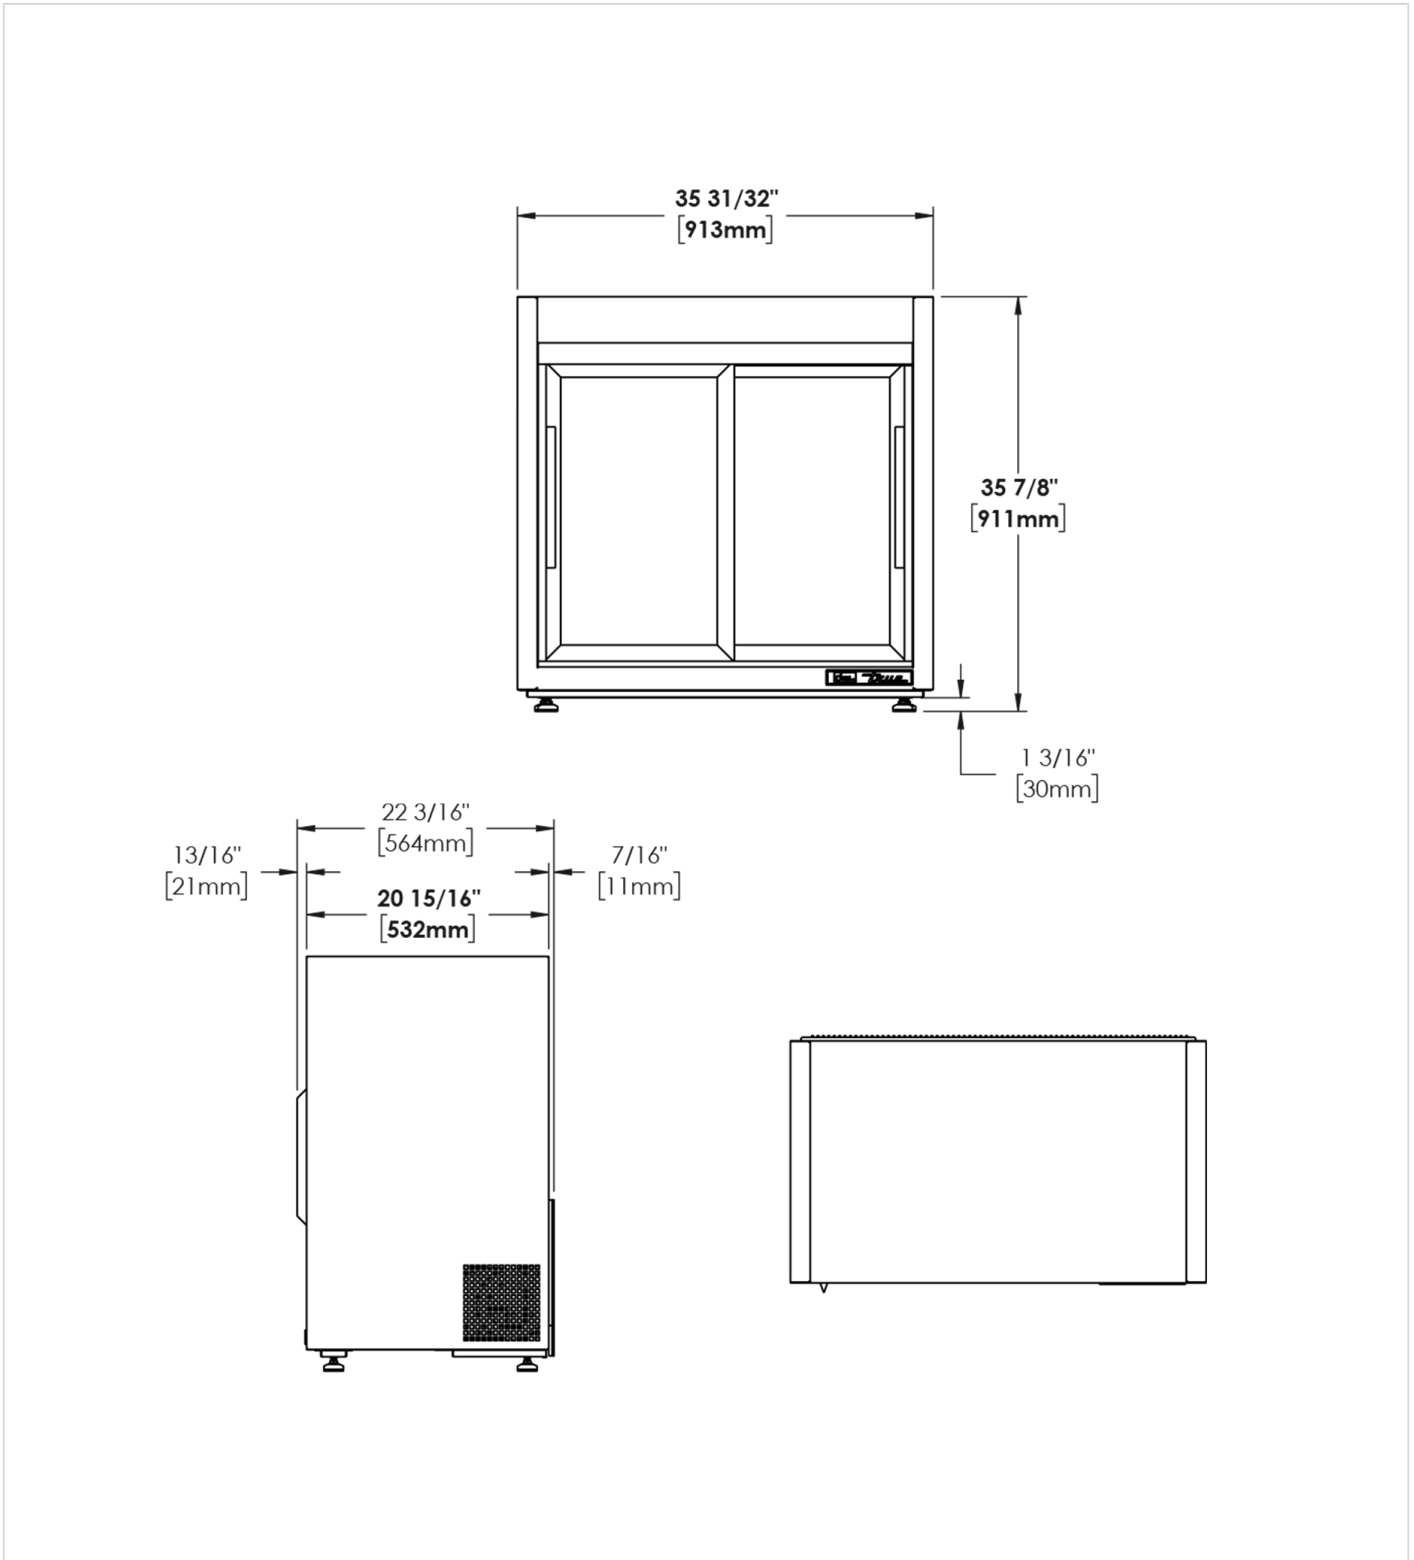

Specifications subject to change without notice.  
Technical data above related to energy use based on testing of 50Hz or Dual Frequency models  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049  
EMEA +41 61 563 07 05  
Australia +61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

