



1

DOMINATORPLUS

G3845F Twin Pan Fryer with Filtration

Key features

- Energy efficient, high performance burners
 - Quick heat up and recovery times
- Automatic two-stage filtration built in
 - Increases oil longevity and maintains quality
- Pans independently controlled & can be drained separately
 - Energy efficient as only use one pan during quieter periods
- Twin pans add flexibility to any kitchen
 - Confidently cater for specific dietary requirements
- Stainless steel hob with mild steel pans
 - Robust construction to withstand busy demands
- Temperature range between 140 - 190°C
 - Variable, precise control
- Sediment collection zone
 - Keeps all cleaner for longer
- Piezo ignition
 - Simple, trouble-free operation
- Fast-acting safety thermostat
 - Power cut to unit if oil overheats
- Supplied with fish grid, basket and lid
 - Everything you need to start frying

Accessories

- Sidescreens
- Factory fitted, adjustable castors
- Fixed installation kit


Similar Models

- G3840F Single pan fryer with filtration
- G3860F Single pan fryer with filtration
- G3865F Twin pan fryer with filtration



Please note this fryer does not have a fat melt cycle

Twin Pan Fryer

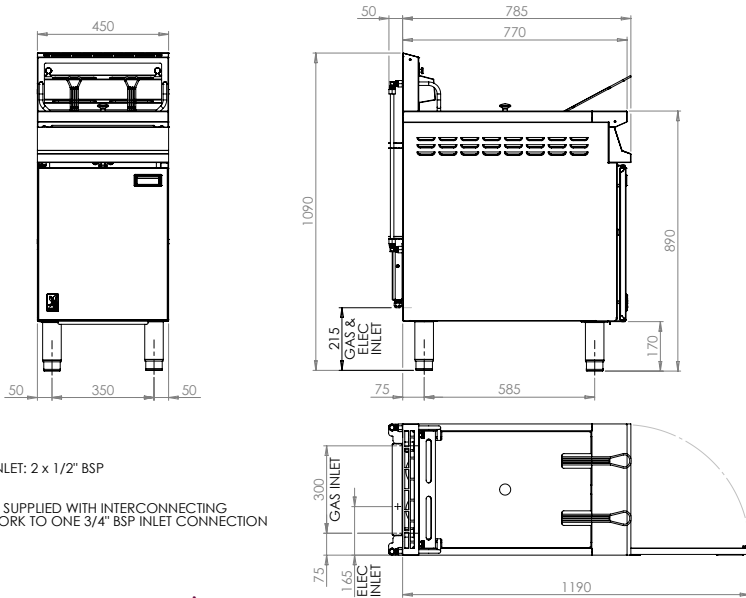

GAS INLET: 2 x 1/2" BSP
 NOTE: UNIT IS SUPPLIED WITH INTERCONNECTING PIPEWORK TO ONE 3/4" BSP INLET CONNECTION

Measurements *in mm*

Unit on castors is the same hob height

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

Specification *details*

Total rating (natural and propane - kW - Nett)	2 x 11.4		
Total rating (natural and propane - btu/hr - gross)	2 x 39,000		
Inlet size (natural and propane)	3/4" BSP		
Flow rate - natural (m ³ /hr)	1.19		
Flow rate - propane (kg/hr)	0.45		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	13.6 / 36.5		
Oil capacity (litres)	12.8 per pan		
Hourly chip output (kg)	34		
Weight (kg)	100		
Packed weight (kg)	109		
Packed dimensions (w x d x h - mm)	500 x 1000 x 1300		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)
5056466902100	5056466902094	5056466902124	5056466902117

