

ELECTRIC CHARGRILL 600mm

E594D-B, E594D-LS, E594D-CB

- Heavy-duty electric chargrill
- Direct contact cooking elements
- Fast response heat control
- Up to 400°C cooking temperature
- No cooking grates required
- 8.4kW heating power
- 2 models of base unit
- Rear rollers
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



E594D-LS

Overall Construction

Chargrill

- Welded hob with 2.0mm 304 stainless steel top
- Side panels 1.2mm stainless steel
- Splashback 1.2mm stainless steel
- Stainless steel splash guards sides and rear
- Vitreous enamelled control panel
- Stainless steel grease tray

Bench mount (supplied as – B model)

- Four 63mm dia. heavy-duty 1.2mm 304 stainless steel bench legs with adjustable feet
- Adjustable height 80mm – 105mm

Leg stand (supplied as – LS model)

- Fully modular for matched suite finish
- Framed top for connection to Chargrill
- 63mm dia. heavy-duty 1.2mm stainless steel legs with two adjustable feet at front and two rollers at rear
- Fully modular framed stand shelf with 0.9mm stainless steel finish
- Quick assembly design

Cabinet base (supplied as – CB model)

- Fully modular for match suite finish
- Double skin 0.9mm stainless steel interior and exterior
- 63mm dia. heavy-duty 1.2mm stainless steel legs with two adjustable feet at front and two rollers at rear
- Optional GN 1/1 4 position racking kit

Controls

- Single heat zone control
- Element hinge switch for heating element cut-out when elements hinged up
- Large easy use control knob - heat resistant reinforced
- Easy view control settings on knob
- Indicator light for power heating

Cleaning and Servicing

- All models with easy clean stainless steel external finish
- Removable splash guards
- Hinge up elements with safety support stay
- Element cleaning tool
- Full size grease/debris collection tray
- Control service through front of unit

ELECTRIC CHARGRILL 600mm

E594D-B, E594D-LS, E594D-CB

Specifications

Elements

5 direct contact heating elements

Cooking area

450mm x 590mm, 2655cm²

Electrical requirements

8.4kW

400-415Vac, 50/60Hz, 3P+N+E

L1 11A

L2 11A

L3 15A

Electrical connection

130mm from LH side, 30mm from rear, 635 from floor

Dimensions

Bench model

Width 600mm

Depth 812mm

Height 355mm

Incl. splashback option 525mm

All models (excluding Bench model)

Width 600mm

Depth 812mm

Height 915mm

Incl. splashback option 1085mm

Nett weight

Bench and Leg Stand models

68kg

Cabinet Base models

70kg

Packing data

Bench and Leg Stand models

0.49m³, 104kg

Width 645mm

Depth 870mm

Height 855mm

Cabinet Base models

0.70m³, 127kg

Width 645mm

Depth 870mm



Height 1255mm

Options



Adjustable feet at rear

Castors



E594D-B

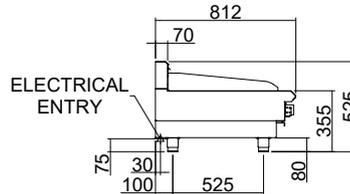


E594D-LS

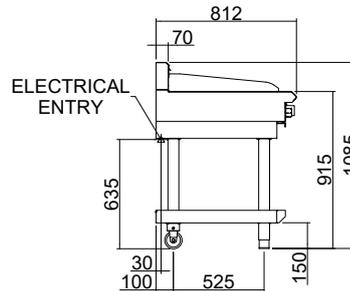

E594D-CB

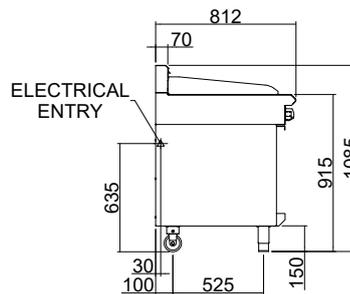

E594D



www.blue-seal.co.uk

United Kingdom

blue-seal.co.uk

Blue Seal Limited

Unit 67

Gravelly Business Park

Gravelly

Birmingham B24 8TQ

England

Telephone 0121-327 5575

Facsimile 0121-327 9711

sales@blue-seal.co.uk

Australia

moffat.com.au

Moffat Pty Limited

740 Springvale Road

Mulgrave

Victoria 3170

Australia

Telephone +613-9518 3888

Facsimile +613-9518 3833

vsales@moffat.com.au

New Zealand

moffat.co.nz

Moffat Limited

45 Illinois Drive

Izone Business Hub

Rolleston 7675

New Zealand

Telephone +64 3-983 6600

Facsimile +64 3-983 6660

sales@moffat.co.nz

International

moffat.com

international@moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Blue Seal products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



Copyright Moffat Ltd.
UK.BS.01.23

an Ali Group Company



The Spirit of Excellence