

G - EVO SERIES

G-EVO 50 R

POT & UTENSIL WASHER - FRONT LOADING EXECUTION

DESCRIPTION

Heavy Duty pot & utensil washer - three phase - double skin execution - upper control panel - Wi-Fi connectivity and Comenda web portal for remote control and monitoring as a standard - integrated RCD Rinse Control Device.

STANDARD FEATURES

DURABILITY

- Double skin insulated body in AISI 304;
- Molded double skin counterbalanced insulated door;
- Ergonomic stainless steel handle.

HYGIENE

- Stainless steel extractable filters;
- RCD - Rinse control device;
- Stainless steel separated Wash and rinse arms;
- One piece deep drawn wash tank with rounded corners to prevent soil deposit;
- Removable wash and rinse arms support;
- Self-cleaning cycle at unit switch off;
- Double filtration system: stainless steel surface filter and basket filter.

SAFETY

- Magnetic microswitch to stop the cycle in case of accidental door opening;
- Adjustable Thermostop as a standard: it ensures that the correct operating temperatures are reached;
- Temperature measurement via electronic probes: accuracy and reliability;
- Provision for peak power reduction connection (PCE).

POWER AT YOUR FINGERTIPS

- Upper control panel;
- Display with temperature indicators
- 4 programming options for washing cycles (short - medium - long - intensive)
- Diagnostics with alphanumeric alarm codes
- Cycle progress with graphics countdown
- Cycles and performances counter: allows the technician to plan maintenance. Useful for statistics and usage informations.
- Colour- coded status indicators: the intuitive START button features clear cycle monitoring with to help your operations to run at its best.

G-EVO 50 R

STANDARD FEATURES

WI-FI CONNECTIVITY AND REMOTE MONITORING

The new Wi-Fi Pack, allows the operator to easy monitoring the machine functions and access a vast amount of information; prevent possible failures by managing the anomalies in real time from smartphome, tablet and PC and keep consumptions under control.

COMENDA CLOUD WASHING WEB PORTAL


Simple and intuitive gives you the power to:

- Check the main operating parameters of the unit;
- Start/stop the washing cycle;
- Download Records and HACCP reports;
- Access the alarm list and manage the anomalies;
- Check and download technical documentation;
- Save unit specific parameters or data settings;
- Adjust temperatures and dosage for chemicals;
- Plan the calls out for fixing only if necessary;
- Develop periodic reports for the end user;
- Make a remote assessment of wear parts;

STANDARD EQUIPMENT

RACKS & INSERTS

- Silver rack mm 550x660;
- 8 - compartment silver rack;
- Insert for 3 bake pans h 65 mm

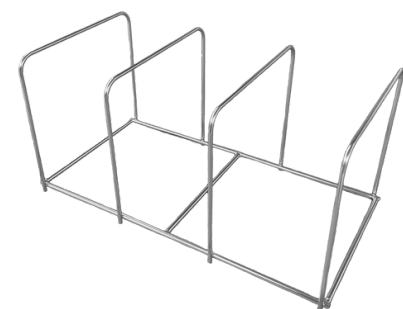

















G-EVO 50 R

OPTIONAL

- Surcharge for built-in drain pump;
- Surcharge for built-in peristaltic detergent dosing pump;
- Surcharge for built-in peristaltic rinse aid dosing pump;
- Drain Pump kit (provided separately);
- Detergent dosing pump kit (provided separately);
- Rinse Aid dosing pump kit (provided separately);
- Surcharge for 9/14 kW booster;
- CRC - Heat Recovery Unit: allows for cold water connection (15 to 30 deg C); allows for consistent energy savings, minimizing the steam released;
- External Water Softener;
- Special Voltages on request;
- Folding Door.

G-EVO 50 R



TECHNICAL DATA

	EXTERNAL SIZE	751x810x1850 mm
	OVERALL SIZE	1330x2190 mm
	CLEARANCE	850 mm
	RACK SIZE	550x660 mm
	ELECTRICAL SUPPLY	400V/3N/50Hz
	WASH PROGRAM LENGHT	120/240/360/480 "
	MAX OUTPUT - WARM WATER CONNECTION (55 C°) ●	21/15/10/8 racks/h
	MAX OUTPUT - COLD WATER CONNECTION (15 C°) ●	11/11/10/8 racks/h
	RINSE WATER CONSUMPTION	4 l/rack
	TANK HEATER ELEMENT	3 kW
	BOOSTER HEATER ELEMENT	6 kW
	TANK SIZE	42 l
	WASH PUMP	1,5 kW
	INSTALLED LOAD	7,5 kW
	NOISE	68 dB(A)
	WEIGHT	150 kg


CRC Execution: machine height will increase by 300 mm

G-EVO 50 R

TECHNICAL DRAWINGS

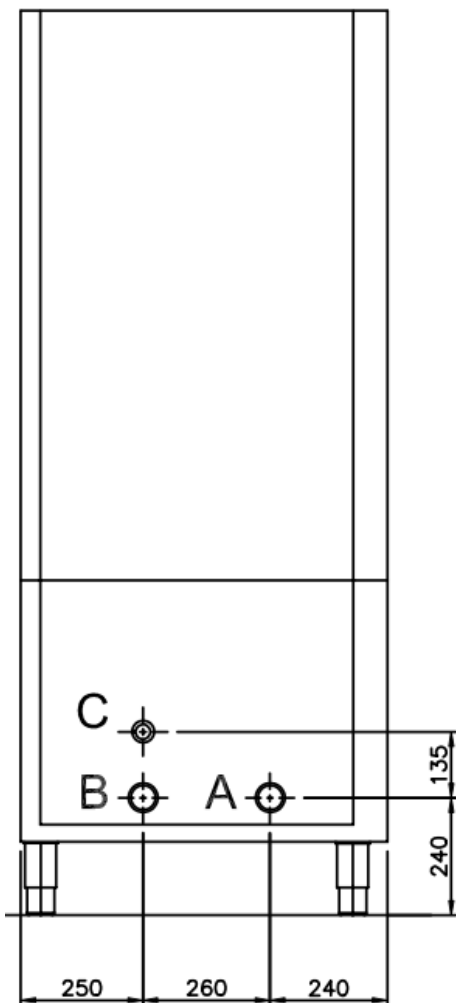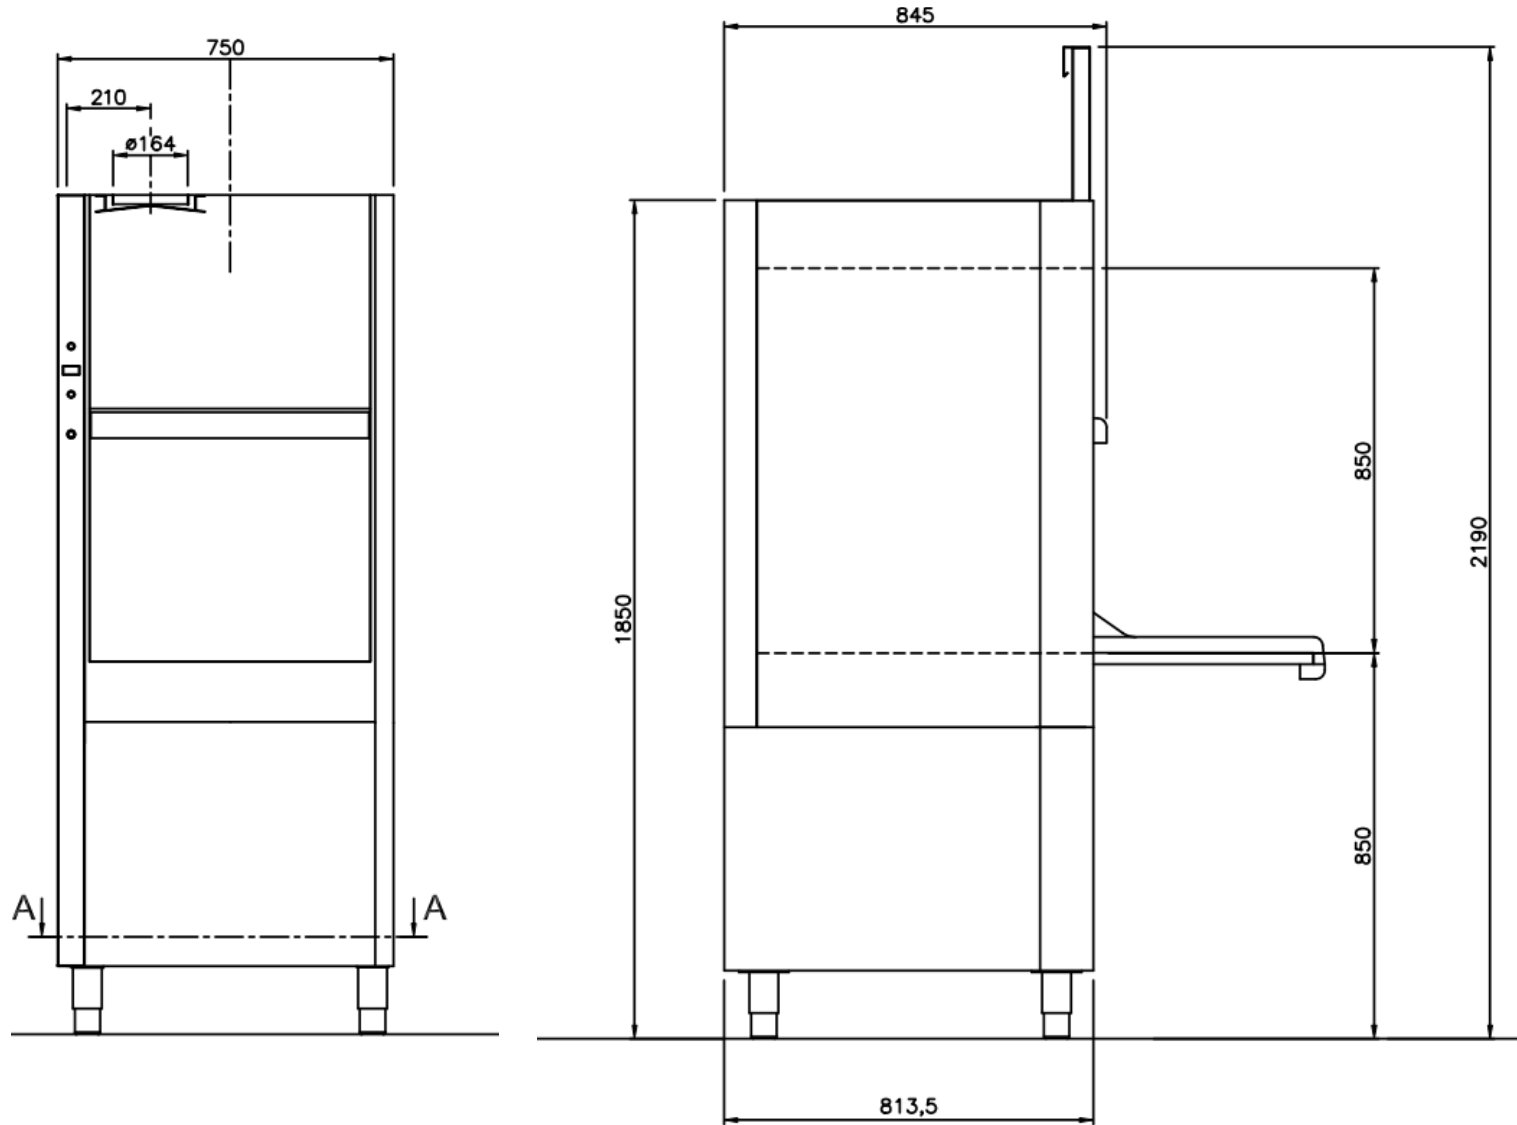

ALLACCIAMENTI - BRANCHEMENTS - CONNECTIONS - ANSCHLUSSE					
A	SCARICO VASCHE - VIDANGE CUVES TANKS DRAIN - TANKEABLAUF	50mm min	ØF	E*	ENTRATA VAPORE - ARRIVEE VAPEUR STEAM INLET - DAMPFZULAUF
B	ENTRATA ACQUA - ARRIVEE EAU WATER INLET - WASSERZULAUF	-2/4BAR	3/4"	ØM	F*
C	ALLACCIAMENTO ELETTRICO - BRANCHEMENT ELECTRIQUE ELECTRICAL CONNECTION - ELEKTROANSCHLUSS				

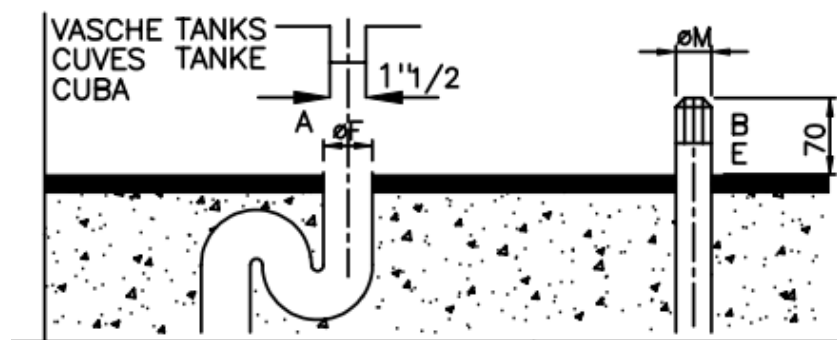

The stated values may deviate depending on installation conditions and items washed.
Comenda Ali Group srl reserves the right to modify product specifications at any time without prior notice.