



GLASSWASHER GP-50B 230/50/1

Rack size 500 mm x 500 mm and door clearance 260 mm.



1303167



OPTIONAL

- ☐ Overflow drainage pump. Tank of density. water renewal by the principle

ACCESSORIES

- ☐ Manual water softeners
- ☐ Automatic water softeners
- ☐ 500 x 500 mm baskets
- ☐ Inserts & supplements
- ☐ High feet kit
- ☐ Reverse osmosis devices OS-140

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Useful height: 260 mm
Cycle duration: 120 / 150"
Production baskets / hour: 30 / 24
Boiler capacity: 4.5 l
Wash tank capacity: 23 l
Water consumption/cycle: 2.7 l

Loading

- ✓ Pump: 500 W / 0.75 Hp
- ✓ Tank: 1800 W
- ✓ Boiler: 2500 W
- ✓ Total loading: 3000 W

Electrical supply: 230 V / 50 Hz / 1~ (13 A)
Electrical connection: 2P+G

External dimensions (W x D x H)

- ✓ Width: 580 mm
- ✓ Depth: 630 mm
- ✓ Height: 710 mm

Net weight: 53 kg
Noise level (1m.): <70 dB(A)

Crated dimensions
640 x 695 x 960 mm
Gross weight: 61 kg

SALES DESCRIPTION

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ Upper and lower washing.
- ✓ Construction in stainless steel AISI 304 2B.
- ✓ Interior with rounded finishes to prevent the accumulation of dirt.

Double filter system

- ✓ Maximum protection of the washing pump.

Double-walled door

- ✓ Double-walled door, safety microswitch and high quality seal: perfectly soundproof and watertight.

Warewashing, made simple

- ✓ GP Xperience: simple and intuitive use.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Electronic control panel with IP65 humidity protection.
- ✓ 100% tested.

Tech-friendly

- ✓ Tool-free extraction of diffusers and filters for maintenance and cleaning.
- ✓ Easy access to components for repair.

INCLUDES

- ✓ Peristaltic detergent pump.
- ✓ Rinse aid pump.
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.






GLASSWASHER GP-50B 230/50/1

Rack size 500 mm x 500 mm and door clearance 260 mm.




1303167

WARE WASHING
COMMERCIAL GLASSWASHER • GLASS-PRO LINE

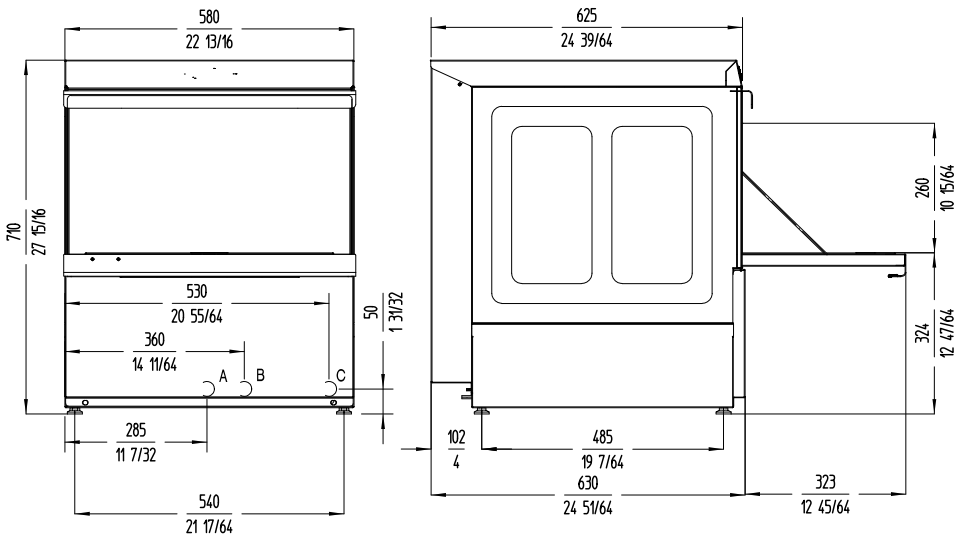

A: Entrada de agua 3/4" GAS.
B: Tubo de desagüe Ø30 mm.
C: Cable conexión.

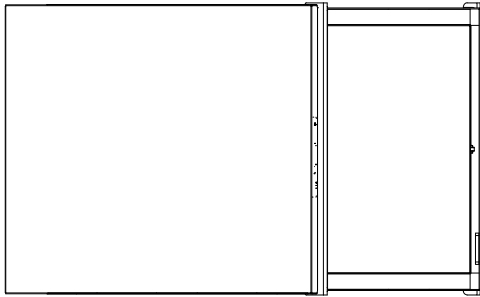

sammic.co.uk
Food Service Equipment Manufacturer
Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 20/03/2025