

DISHWASHER AX-51B 230/50/1

Multipower glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 380 mm. Power configurable to 13 / 16 / 20 / 25 amp option.

1303190

SALES DESCRIPTION

Sani-Control: guaranteed disinfection.

Embedded bodywork and easy-grip door: hygienic and ergonomic.

Exclusive Hydroblade[™] washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Multi-power model. Default boiler loading: 2000W.

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- Embedded basket guides.

Hydroblade[™] washing arms

- Redesigned nozzles for greater washing performance.
- The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle



- WARE WASHING R WARFWASH MFRCIAL UNDFRCOUN
- ✓ The integration of the components provides greater resistance and robustness
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands. ✓ Double-walled door with safety microswitch and high quality seal.
- 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39 cm.

Warewashing, made simple

- ✓ Active Xperience: simple and intuitive use.
- Dedicated cycles: selection of the ideal washing programme using icons.
- Electronic control panel with IPXX humidity protection.

You will never WASH ALONE

- Tech Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

NCLUDES

- Peristaltic detergent pump.
- 1 mixed basket (plates). 1 small basket for cutlery.
- Rinse aid pump. 1 glasses basket.

OPTIONAL

- Overflow drainage pump. Tank water renewal by the principle of density.
- Double-level accessory for washing two baskets at the same time.

- Manual water softeners
- Automatic water softeners
- □ 500 x 500 mm baskets
- Reverse osmosis devices
 - OS-140

High feet kit

Double rack kits for AX/UX

SPECIFICATIONS

Inserts & supplements

Basket dimensions: 500 mm x 500 mm Useful height: 380 mm

Cycle duration: [v:ciclo1] / [v:ciclo2] / [v:ciclo3] Production baskets / hour: 30 / 24 / 17

Wash temperature: 50°C - 65°C Rinse temperature: 75°C - 85°C

- Boiler capacity: 8 I
- ✓ Wash tank capacity: 14 I
- ✓ Water consumption/cycle: 2.7 I

Energy consumption

Water consumption/cycle (kWh): [v:cons_ciclo_kwh] Tank filling consumption (kWh): [v:cons_llenado_cuba_kwh]

Loading Pump: 500 W / 0.7 Hp Tank: 1800 W Boiler: 5000 W Total loading: 5500 W



DISHWASHER AX-51B 230/50/1

Multipower glass- and dishwasher. Rack size 500 mm x 500 mm and door clearance 380 mm. Power configurable to 13 / 16 / 20 / 25 amp option.

1303190

10

Electrical supply: 230 V / 50 Hz / 1~ (25 A) External dimensions (W x D x H)


√ Width:580 mm

- ✓ Depth: 635 mm
- ✓ Height: 835 mm

Net weight: 55 kg

Noise level (1m.): <70 dB(A)

Crated dimensions 640 x 695 x 960 mm Gross weight: 62 kg

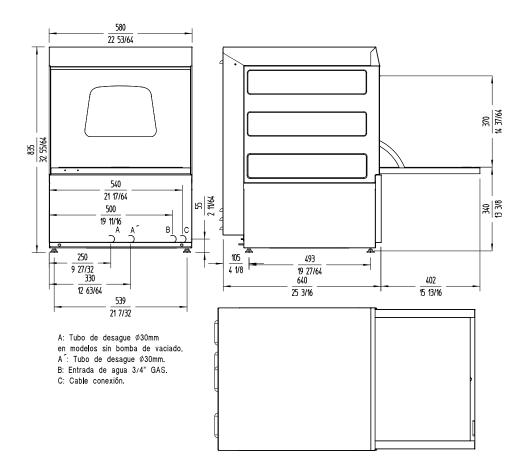



sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet updated 12/03/2025