

# TGN-2R-2S

 2/1 GN Upright Foodservice Refrigerator, 2 Full Solid Swing Doors



| Dimensions                         |  |
|------------------------------------|--|
| External Width (mm)                | 1460   |
| External Depth (mm)                | 858  |
| External Height (mm)               | 2079   |
| Exclusions                         | Depth does not include 46 mm for door handle or 13 mm for rear access panel. |
| Net Volume (Litres)                | 882  |
| Gross Volume (Litres)              | 1440   |
| Supplied Shelves                   | 6  |
| Shelf Size (L x D mm)              | 530 x 650  |
| Internal Net Height (mm)           | 1350   |
| Unpackaged Weight (kg)             | 259  |
| Packaged Weight (kg)               | 270  |
| Packaged Dimensions (W x D x H mm) | 2032 x 813 x 2134  |
| Supplied Supports                  | Ø 64 mm castors (83 mm height)   |

| Build                 |   |
|-----------------------|---|
| Door Description      | 2 Solid Swing Doors                           |
| Exterior Construction | Stainless steel front, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base  |
| Air Intake Position   | Front   |
| Ventilation Position  | Rear  |
| Clearance Required    | 26 mm rear, zero sides                        |
| Cord Length (Meters)  | 2.74  |
| Internal Lighting     | LED   |
| Standard w/ Locks     | standard                                      |

| Technical                   |  |
|-----------------------------|--|
| Temperature Holding         | 0.5 : 3.3°C  |
| Refrigerant                 | R290   |
| Voltage / Frequency / Phase | 220-240V/50-60Hz/1   |
| Amps                        | 1.4  |
| Wattage                     | 322  |
| Climate Class               | 5  |
| Operating Statement         | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Testing Standard            | EN 16825   |
| EEC                         | C  |
| EEl                         | 36.2   |
| kWh/24hr                    | 2.04   |
| kWh/Annum                   | 746  |
| Defrost Type                | Auto   |



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
Europe  
Australia


0800 783 2049  
+49 (0) 7622 6883 0  
+61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueGermCustomerService@truemfg.com](mailto:TrueGermCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TGN-2R-2S

2/1 GN Upright Foodservice Refrigerator, 2 Full Solid Swing Doors

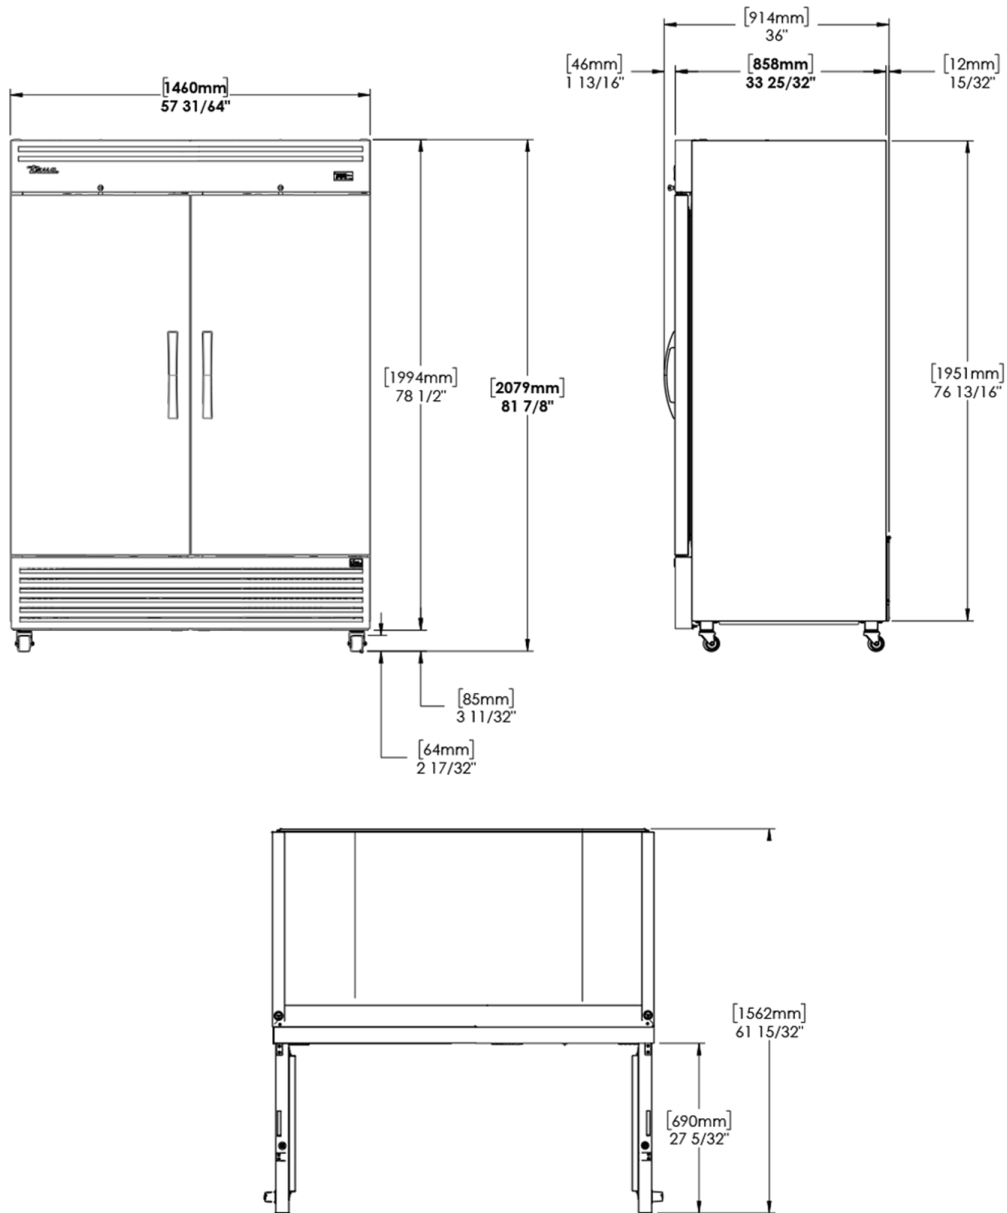

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
Europe  
Australia

0800 783 2049  
+49 (0) 7622 6883 0  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueGermCustomerService@truemfg.com  
TrueRefAus@truemfg.com

