



## C0223T - Lincat Convactor Touch Electric Counter-top Convection Oven - W 810 mm - D 850 mm - 3.0 kW

Able to roast, braise, bake and reheat, a C0223T Convactor convection oven is a powerful addition to any commercial kitchen.

- ✓ 2 x GN1/1 capacity
- ✓ Touchscreen control with easy-to-use icon-driven menu selections
- ✓ Easy-view traffic light status - see the status of the oven at a glance, even in the noisiest kitchens
- ✓ Space for 24 programs with up to four stages, which can be adjusted individually
- ✓ Up to four-stage phased cooking for perfect results - set temperature, time, fan speed and humidity injection for each stage
- ✓ Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- ✓ Five levels of humidity injection
- ✓ Nine-hour on-screen timer, with electronic buzzer, and flashing oven lamps to indicate that cycle has finished

### Specifications

#### Summary

<b>Range Name</b>	Convactor
<b>Power Type</b>	Electric
<b>Unit Type</b>	Counter-top
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN Code</b>	5056105118275

#### Power and Performance

<b>Gastronorm Capacity</b>	2 x GN1/1
<b>Total Power kW</b>	3.0
<b>Temperature Range °C</b>	30-260
<b>IP Rating</b>	IP23
<b>Temperature Control</b>	Electronic
<b>Oven Rating kW</b>	2.8

#### Key Specifications

<b>Capacity Litres</b>	96
<b>Number of Shelves included</b>	2
<b>Number of Shelf Positions</b>	2
<b>Type of Lighting</b>	Halogen Bulb

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	645
<b>Unit Width (External) mm</b>	810
<b>Unit Depth (External) mm</b>	850
<b>Height (Internal) mm</b>	308
<b>Width (Internal) mm</b>	690
<b>Depth (Internal) mm</b>	470
<b>Shelf Dimensions Width mm</b>	660
<b>Shelf Dimensions Depth mm</b>	425
<b>Net Weight Kg</b>	80




#### Supply Connections

<b>Requires Installation</b>	No
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	Yes
<b>Requires Hardwiring</b>	No
<b>Electrical Supply Rating Watts</b>	3000
<b>Single Phase Amps</b>	13
<b>Single Phase Voltage</b>	240
<b>Water Connection Pressure Bar</b>	2-6
<b>Drain Connection</b>	No
<b>Water Connection</b>	3/4"

#### Shipping

<b>Packed Weight Kg</b>	92.1
<b>Packed Height cm</b>	81.5
<b>Packed Width cm</b>	88
<b>Packed Depth cm</b>	100

Technical Picture

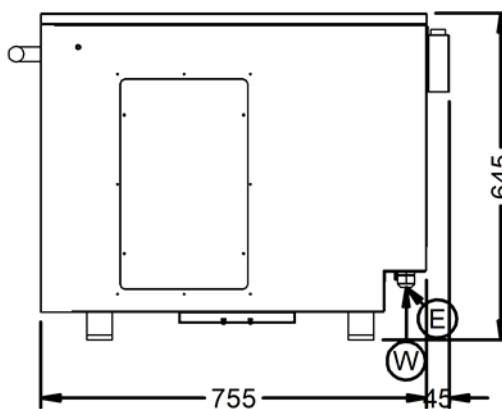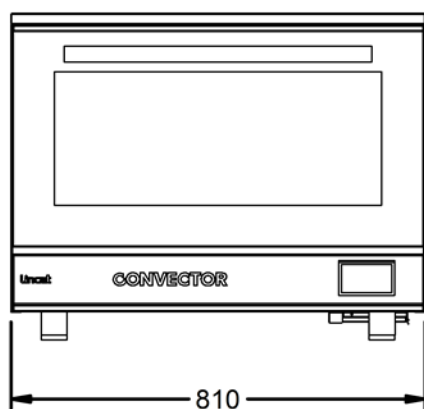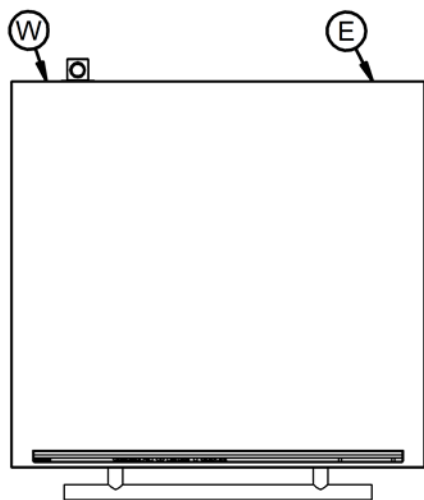

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm