

SILVERLINK 600



J5/P - Lincat Silverlink 600 Propane Gas Freestanding Single Tank Fryer - 1 Basket - W 300 mm - 12.0 kW

Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Gas Fryer.

- Single tank fryer delivering 22.5kg of chips an hour, perfect for pubs, restaurants and care homes
- Front mounted controls for safety
- Thermostatically controlled to give accurate cooking temperatures throughout cooking. Flame failure device and top temperature cut out ensures safe operation.
- Cool zone collects cooking debris gives cleaner cooking results and saves money by prolonging the life of the oil

- Piezo ignition for easy lighting
- Heavy duty nickel plated baskets for the most demanding of operations
- Internal drain off tap for easy removal of cooking

Specifications			
Summary		Power and Performance	
Brand	Lincat	BTU per Hour	38,555
Range	Silverlink 600	Total Power kW	11.3
Power Type	Gas	Temperature Range °C	110-190
Gas Type	Propane Gas	Temperature Control	Mechanical
Unit Type	Free-standing		
Available in UK Only	No		
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105105138		
Key Specifications		Capacity	
Number of Baskets	1	Product Output per Hour	18kg chips -12mm [frozen], 22.5kg chips -
Number of Tanks	1	Troduct Output per from	12mm [ch
Gravity Filtration	No	Capacity Litres	12.0
Pumped Filtration	No		
Drain Location	Internal		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	1060	Requires Installation	Yes
Unit Width (External) mm	300	Requires Electrical Supply	No
Unit Depth (External) mm	690	Gas Connection BSP	1/2"
Net Weight Kg	43	Gas Consumption at full rate Propane m³ per Hour	0.81
		Gas Pressure Propane mbar	25.0
		Total heat input at full rate Propane kW	11.3
		Total heat input at full rate Propane BTU per hour	36,800



SILVERLINK 600

Shipping


Packed Weight Kg52Packed Height cm122Packed Width cm85Packed Depth cm45


Available Accessories


CH01 Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU

CH02 Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU

Technical Picture





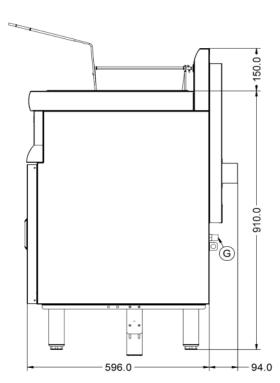







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm



Page Number: 3 **Print Date:** 04/02/2020 Product Code: J5/P