

DOMINATORPLUS

G3122 Two Burner Boiling Top

Key features

- Energy efficient, high performance 5.3kW burners
 - Quick heat up, reduced waiting time
- Semi-sealed, pressed stainless steel hob
 - Easy to remove and keep clean
- Single cast iron pan support
 - Long-lasting and robust
- · Mounted upon open stand
- Under shelf provides useful storage space
- Laser-etched control icons
 - Permanent, indelible markings

Accessories

- Fully integrated extended flue
- Fixed stand
- Factory fitted, adjustable castors
- · Fixed installation kit


Similar Models

- G9042 Two burner boiling top
- G3124 Four burner boiling top
- E3122 Two hotplate boiling top
- E3902i Two zone induction boiling top





Two Burner Gas Boiling Top

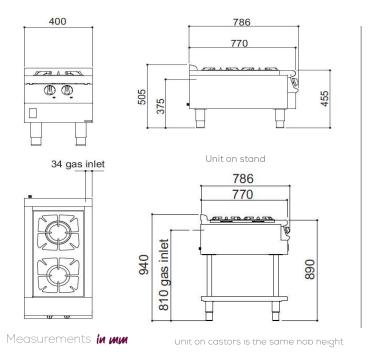

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

Specification details

Total rating (natural and propane - kW - Nett)	10.6	
Total rating (natural and propane - btu/hr - gross)	39,800	
Inlet size (natural and propane)	3/4" BSP	
Flow rate - natural (m³/hr)	0.82	
Flow rate - propane (kg/hr)	1.11	
Inlet pressure (natural and propane - mbar)	20 / 37	
Operating pressure (natural and propane - mbar)	15 / 37	
Hob burner rating * (natural and propane - kW)	5.3 x 2	
Hob burner rating * (natural and propane - btu/hr)	19,900 x 2	
Weight (kg)	28.5	
Packed weight (kg)	34	
Packed dimensions (w x d x h - mm)	400 x 1000 x 500	
GTIN numbers	Nat Gas	LPG