

# **1000-SK-I** Low Temperature Smoker Oven



Shown with optional burgundy exterior



• Halo Heat . . . a controlled, uniform heat source that maintains close temperature tolerances throughout the cooking and holding function. Offers uniform and consistent cooking on a daily basis, low shrinkage of bulk or portion-cut protein items, higher food moisture content, and significantly longer holding life.

- Smokes with real wood chips no pressure cooking, no artificial smoke flavor.
- Smoke timer offers a choice of mild, medium, or heavy smoke flavor.
- Cooks, smokes, and holds meats, poultry, and fish.
- Cold smokes fish and cheese.
- Induces natural enzyme action in meat for tenderizing.
- Less energy usage than conventional ovens.
- Reduces labor and evens-out work loads.
- Non-magnetic stainless steel interior, racks, and shelves resist corrosion.
- Simple control senses temperature drops faster, providing quick heat recovery time.

### **Short Form Spec**

Alto-Shaam double compartment 1000-SK-I Smoker oven is constructed with a stainless steel exterior. Oven includes stainless steel doors with magnetic latch. Each compartment is equipped with two (2) stainless steel side racks with eight (8) pan positions spaced on 2-5/16" (59mm) centers, two (2) stainless steel wire shelves, one (1) stainless steel rib rack, a removable stainless steel drip pan with drain and a wood chip container. Oven is furnished with an exterior, front mounted stainless steel drip tray and one (1) sample bag each of cherry, hickory, apple, and maple wood chips. Oven includes one (1) set of 5" (127mm) casters - 2 rigid, and 2 swivel with brake.

Each compartment has a simple control with an On/Off power switch; cook temperature knob, 200°F to 325°F (94°C to 160°C); hold temperature knob, 60°F to 205°F (16°C to 96°C); digital display, up/down arrows to set cook and hold time; and a sixty minute smoking timer. Control features indicator lights for the cook, hold, and smoke functions, and when the oven is calling for heat. Oven is equipped with a voltage conversion switch, located on the back of the oven, for voltage selection (208 or 240 V.A.C.) at time of installation.

□ **Model 1000-SK-I:** Double compartment low temperature smoker oven with simple control.




## **Factory-Installed Options**

- Door Choices:
  Solid Door, standard
  Window Door, optional
  Door Swing Choices:
- $\square$  Right-hand swing, standard  $\square$  Left-hand swing, optional
  - Voltage Choices: □ 208-240V □ 230V
  - Exterior Panel Color Choices:
     Stainless steel, standard
     Burgundy, optional
     Custom color, optional
- Cooking thermostat limit set at 250°F for restricted areas of the U.S.A.
   □ Specify on order as required
   □ Extended drip tray (not available with bumper)

### **Additional Features**

### □ Rib Rack Shelf • Item SH-29474

Special non-magnetic stainless steel wire shelf designed to hold ribs or fish in an upright position for more even smoking. Each shelf will hold thirteen full ribs. One (1) rib rack shelf is furnished with each compartment. Additional racks are available as an option. Capacity: Three (3) rib rack shelves per compartment.






On all Cook & Hold heating elements (excludes labor).



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only www.alto-shaam.com

Printed in the U.S.A.

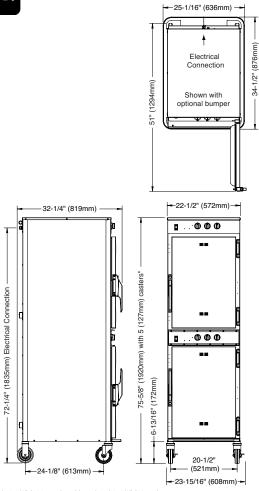

# **1000-SK-I** Low Temperature Smoker Oven

End a stand		
Exterior:		
	75-5/8" x 23-15/16" x 32-1/4"	
	(1920mm x 608mm x 819mm)	
Interior: (e	ich compartment)	
	26-7/8" x 18-7/8" x 26-1/2"	
	(683mm x 479mm x 673mm)	

Electrical							
V	Ph	Hz	Α	kW			
208	1	60	31.4	6.5	No cord		
240	1	60	24.3	5.8	or plug		
230	1	50/60	24.1	5.5	No cord		
					or plug		

	120 lbs (54kg	g) maximum
	Volume maximum:	60 quarts (76 liters)
	Full-size pans:	Gastronorm 1/1:
Three (3)	20" x 12" x 2-1/2"	530mm x 325mm x 65mm
— on optiona	l wire shelves only	
	Full-size sheet pans	
Seven (7)	18" x 26" x 1"	

\*74-1/4" (1885mm) - with optional 3-1/2" (89mm) casters \*75-1/2" (1917mm) - with optional 6" (152mm) legs

Clearance Requirements			Installation Requirements		
Rear		n non-heated surfaces om heat producing equipment	<ul> <li>Oven must be installed level.</li> <li>The oven must not be installed in any area where it may</li> </ul>		
Тор	<b>p</b> 2" (51mm)		be affected by steam, grease, dripping water, extreme		
Left, Right	t 1" (25mm)		temperatures, or any other severely adverse conditions. — Appliances with casters and no cord or plug must be secured		
Weight			to the building structure with a flexible connector.		
Net:         377 lb (171 kg)         Ship:         445 lb (202 kg) EST.		<b>Ship:</b> 445 lb (202 kg) EST.	Not factory supplied.		
<b>Carton dimensions:</b> (L x W x H) 35" x 35" x 82" (889mm x 889mm x 2083mm)			<ul> <li>Smoker ventilation requirements to be determined by local installation codes.</li> </ul>		

Accessories					
Bumper, Full Perimeter	□ Pan Grid, Wire, 16-3/8" x 24-3/8" (416mm x 619mm)				
□ Carving Holder, Prime Rib	HL-2635	— fits inside of an 18" x 26" sheet pan			PN-2115
□ Carving Holder, Steamship (Cafeteria) Round	4459	Security Panel w/ Key Lock			5013935
Casters, Stem - 2 rigid, 2 swivel w/brake		Shelf, Stainless Steel, Flat Wire			SH-2325
$\Box$ 3-1/2" (89mm)	5008017	Shelf, Stainless Steel, Rib Rack			SH-29474
		Woodchips, bag			
Door Lock with Key - each handle	LK-22567		2.0 lb (.9 kg)	1.25 cu. ft. (35 L)	2.5 cu. ft. (71 L)
□ Drip Pan with Drain, 1-7/8" (48mm deep)	5005616	Cherry	□ WC-22540	□ WC-22541	□ WC-37746
Drip Pan without Drain 1-7/8" (48mm deep)	11906	Apple	□ WC-22542	□ WC-22543	🗆 WC-37747
Drip Pan without Drain 4" (101mm deep)	15929	Maple	□ WC-22544	□ WC-22545	□ WC-37748
□ Legs, 6" (152mm), Flanged (set of four)	5011149	Hickory	□ WC-2828	□ WC-2829	□ WC-37749



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. Phone: 262.251.3800 800.558.8744 U.S.A./Canada Fax: 262.251.7067 800.329.8744 U.S.A. only www.alto-shaam.com